

(FORM PTO-159) (modified) (REV. 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER O17-002
TRANSMITTAL LETTER TO THE UNITED STATES - DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 10/089025
INTERNATIONAL APPLICATION NO. PCT/GB00/03742		INTERNATIONAL FILING DATE 29 September 2000		PRIORITY DATE CLAIMED 29 September 1999
TITLE OF INVENTION METHOD AND APPARATUS TO DIRECT SOUND				
APPLICANT(S) FOR DO/EO/US Anthony HOOLEY, Paul Thomas TROUGHTON, Angus Gavin GOUDIE, Irving Alexander BIENEK, Paul Raymond WINDLE				
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:				
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below. 4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2)) a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input checked="" type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). a. <input type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)) a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)). 11. <input type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409). 12. <input checked="" type="checkbox"/> A copy of the International Search Report (PCT/ISA/210). Items 13 to 20 below concern document(s) or information included: 13. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 14. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 15. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 16. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment 17. <input type="checkbox"/> A substitute specification. 18. <input type="checkbox"/> A change of power of attorney and/or address letter. 19. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 20. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 21. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 22. <input checked="" type="checkbox"/> Certificate of Mailing by Express Mail EL 589 079 498 US 23. <input checked="" type="checkbox"/> Other items or information: PCT/IB/308 - 1 sheet; PCT/IB/306 mailed 24 August 2001, 1 sheet; PCT/IB/306, mailed 12 November 2001, 1 sheet; ADS, 4 sheets.				

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 10/089025		INTERNATIONAL APPLICATION NO PCT/GB00/03742		ATTORNEY'S DOCKET NUMBER O17-002	
--	--	---	--	--	--

24. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :			CALCULATIONS PTO USE ONLY
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO	\$1040.00		
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO	\$890.00		
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO	\$740.00		
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4)	\$710.00		
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4)	\$100.00		
ENTER APPROPRIATE BASIC FEE AMOUNT =		\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30		\$0.00	

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	19 - 20 =	0	x \$18.00	\$0.00
Independent claims	3 - 3 =	0	x \$84.00	\$0.00
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00
TOTAL OF ABOVE CALCULATIONS =				\$890.00
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				\$0.00
SUBTOTAL =				\$890.00
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00
TOTAL NATIONAL FEE =				\$890.00
Fee for recording the enclosed assignment (37 CFR 1.21 (h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>			\$0.00	
TOTAL FEES ENCLOSED =				\$890.00
				Amount to be: refunded \$ charged \$

a. ☒ A check in the amount of **\$890.00** to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **05-0845**. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Gerry J. Elman, Reg. No. 24, 404 Elman & Associates, Customer No., 003775	SIGNATURE Gerry J. Elman NAME 24, 404 REGISTRATION NUMBER March 26, 2002 DATE
--	---

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.101) 10/089025		INTERNATIONAL APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.101) PCT/GB00/03742		<div style="text-align: right;"> IC10 Rec'd PCT/PTO 2-6 MAR 2002 ATTORNEY'S DOCKET NUMBER O17-002 </div>	
24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):				CALCULATIONS PTO USE ONLY	
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00					
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (c)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	19 - 20 =	0	x \$18.00	\$0.00	
Independent claims	3 - 3 =	0	x \$84.00	\$0.00	
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$890.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$890.00	
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30 +				\$0.00	
TOTAL NATIONAL FEE =				\$890.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$890.00	
				Amount to be: refunded	\$
				charged	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$890.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 05-0845 . A duplicate copy of this sheet is enclosed. d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
Gerry J. Elman, Reg. No. 24, 404 Elman & Associates, Customer No., 003775			<div style="text-align: right;"> SIGNATURE Gerry J. Elman NAME 24, 404 REGISTRATION NUMBER March 26, 2002 DATE </div>		

10/089025

JC10 Rec'd PCT/PTO-2 6 MAR 2002

Express Mail EL 589 079 498 US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
RECEIVING OFFICE

In re National Phase Patent Application based on

Title: PCT/GB00/03752, Published as WO 01/23104
Inventor(s): METHOD AND APPARATUS TO DIRECT SOUND
HOOLEY, Anthony; TROUGHTON, Paul Thomas;
GOUDIE, Angus Gavin; BIENEK, Irving Alexander;
WINDLE, Paul Raymond

Int. Filing Date: 29 September 2000

Atty. Docket No: 017-002

Commissioner for Patents

Box PCT, DO/EO/US

Washington D.C. 20231

**Preliminary Amendment Accompanying a Transmittal Letter Concerning a
Filing under 35 U.S.C. § 371**

Sir:

This is a first preliminary amendment accompanying the filing of the National Phase in the United States of the above-identified International Application, which is indicated on accompanying form PTO-1390 as Item 15.

Please enter the following Amendment **before** calculation of the claim fees for submission of this application.

AMENDMENT**In the Specification:**

Please **add** at page 13, following line 2:

The disclosure provided by the claims of WO 01/23104, namely pages 64-109, is hereby incorporated by reference.

In the Claims:

Please **CANCEL** claims 1 to 223 of the International Application without prejudice.

Please **ENTER** claims 224- 242 submitted herewith. No new matter has been introduced into the claims.

224. A method of causing plural input signals representing respective channels to appear to emanate from respective different positions in space, said method comprising:

National Phase of International Application No. PCT/GB99/03742
Preliminary Amendment

providing a sound reflective or resonant surface at each of said positions in space;

providing an array of output transducers distal from said positions in space;

and

directing, using said array of output transducers, sound waves of each channel towards the respective position in space to cause said sound waves to be re-transmitted by said reflective or resonant surface;

said step of directing comprising:

obtaining, in respect of each transducer, a delayed replica of each input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space such that the sound waves of the channel are directed towards the position in space in respect of that channel;

summing, in respect of each transducer, the respective delayed replicas of each input signal to produce an output signal; and

routing the output signals to the respective transducers.

225. A method according to claim 224, wherein said step of obtaining, in respect of each output transducer, a delayed replica of the input signal comprises:

replicating said input signal said predetermined number times to obtain a replica signal in respect of each output transducer;

delaying each replica of said input signal by said respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space.

226. A method according to claim 224 further comprising:

calculating, before said delaying step, the respective delays in respect of each input signal replica by:

determining the distance between each output transducer and the position in space in respect of that input signal;

deriving respective delay values such that the sound waves from each transducer for a single channel arrive at said position in space simultaneously.

National Phase of International Application No. PCT/GB99/03742
Preliminary Amendment

227. A method according to claim 224 further comprising:
inverting one of said plural input signals;
obtaining, in respect of each output transducer, a delayed replica of said inverted input signal delayed by a respective delay selected in accordance with the position in the array of the respective transducer, so that sound waves derived from said inverted input signal are directed at a position in space so as to cancel out at least partially sound waves derived from that input signal at that position in space.
228. A method according to claim 227, wherein said step of obtaining, in respect of each output transducer, a delayed replica of said inverted input signal comprises:
replicating said inverted input signal said predetermined number times to obtain a replica signal in respect of each output transducer;
delaying each replica of said inverted input signal by a respective predetermined delay selected in accordance with the position in the array of the respective output transducer.
229. A method according to claim 227, wherein said inverted input signal is scaled so that the sound waves derived from said inverted input signal substantially cancel sound waves derived from that input signal at said position in space.
230. A method according to claim 229, wherein said scaling is selected by determining, in respect of the input signal which has been inverted, the magnitude of sound waves at said position in space and selecting said scaling so that sound waves derived from said inverted input signal have substantially the same magnitude at that position.
231. A method according to claim 224, wherein at least one of said surfaces is provided by a wall of a room or other permanent structure.
232. An apparatus for causing plural input signals representing respective channels to appear to emanate from respective different positions in space, said apparatus comprising:
a sound reflective or resonant surface at each of said positions in space;

National Phase of International Application No. PCT/GB99/03742
Preliminary Amendment

an array of output transducers distal from said positions in space; and
a controller for directing, using said array of output transducers, sound waves of each channel towards that channel's respective position in space such that said sound waves are re-transmitted by said reflective or resonant surface;

said controller comprising:

replication and delay means arranged to obtain, in respect of each transducer, a delayed replica of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space such that the sound waves of the channel are directed towards the position in space in respect of that input signal;

adder means arranged to sum, in respect of each transducer, the respective delayed replicas of each input signal to produce an output signal; and

means to route the output signals to the respective transducers such that the channel sound waves are directed towards the position in space in respect of that input signal.

233. An apparatus according to claim 232, wherein said controller further comprises:

calculation means for calculating the respective delays in respect of each input signal replica by:

determining the distance between each output transducer and the position in space in respect of that input signal;

deriving respective delay values such that the sound waves from each transducer for a single channel arrive at said position in space simultaneously.

234. An apparatus according to claim 232, wherein said controller further comprises:

an inverter for inverting one of said plural input signals;

second replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of said inverted input signal delayed by a respective delay selected in accordance with the position in the array of the respective transducer and a second position in space so that sound waves derived from said inverted input signal are directed at said second position in space so as to cancel out

National Phase of International Application No. PCT/GB99/03742
Preliminary Amendment

at least partially sound waves derived from that input signal at said second position in space.

235. An apparatus according to claim 234, wherein said controller further comprises a scaler for scaling said inverted input signal so that the sound waves derived from said inverted input signal substantially cancel sound waves derived from that input signal at said second position in space

236. An apparatus according to claim 232, wherein said surfaces are reflective and have a roughness on the scale of the wavelength of sound frequency it is desired to diffusely reflect.

237. An apparatus according to claim 232, wherein said surfaces are optically-transparent.

238. An apparatus according claim 233, wherein at least one of said surfaces is a wall of a room or other permanent structure.

239. An apparatus for causing plural input signals representing respective channels to appear to emanate from respective different positions in space, for use with reflective or resonant surfaces at each of said positions in space, said apparatus comprising:

- an array of output transducers distal from said positions in space; and
- a controller for directing, using said array of output transducers, sound waves of each channel towards that channel's respective position in space such that said sound waves are re-transmitted by said reflective or resonant surface;

- said controller comprising:

- replication and delay means arranged to obtain, in respect of each transducer, a delayed replica of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space such that the sound waves of the channel are directed towards the position in space in respect of that input signal;

- adder means arranged to sum, in respect of each transducer, the respective

National Phase of International Application No. PCT/GB99/03742
Preliminary Amendment

delayed replicas of each input signal to produce an output signal; and

means to route the output signals to the respective transducers such that the channel sound waves are directed towards the position in space in respect of that input signal.

240. An apparatus according to claim 239, wherein said controller further comprises:

calculation means for calculating the respective delays in respect of each input signal replica by:

determining the distance between each output transducer and the position in space in respect of that input signal;

deriving respective delay values such that the sound waves from each transducer for a single channel arrive at said position in space simultaneously.

241. An apparatus according to claim 239, wherein said controller further comprises:

an inverter for inverting one of said plural input signals;

second replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of said inverted input signal delayed by a respective delay selected in accordance with the position in the array of the respective transducer and a second position in space so that sound waves derived from said inverted input signal are directed at said second position in space so as to cancel out at least partially sound waves derived from that input signal at said second position in space.

242. An apparatus according to claim 241, wherein said controller further comprises:


an inverter for inverting one of said plural input signals;

second replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of said inverted input signal delayed by a respective delay selected in accordance with the position in the array of the respective transducer and a second position in space so that sound waves derived from said inverted input signal are directed at said second position in space so as to cancel out

National Phase of International Application No. PCT/GB99/03742
Preliminary Amendment

at least partially sound waves derived from that input signal at said second position in space.

Respectfully submitted,



Gerry J. Elman, Reg. No. 24,404
Attorney for Applicant
ELMAN & ASSOCIATES
Customer No. 003775

Date: March 26, 2002

1008899089025102

27 JUN 2002

Express Mail EL 589 079 555 US

IN THE UNITED STATES PATENT OFFICE AS ELECTED OFFICE

International Patent Application No.: **PCT/GB00/03742**

In re U.S. Patent Application No.: **10/089,025**

Applicant(s): **HOOLEY et al**

Title of application: **METHOD AND APPARATUS TO DIRECT SOUND**

Attorney Docket: **O17-002**

Commissioner for Patents

BOX PCT

Washington, D.C. 20231

**SECOND SUBMISSION OF PRELIMINARY AMENDMENT ORIGINALLY
SUBMITTED MARCH 26, 2002**

Sir:

Applicant herewith transmits a Preliminary Amendment that was originally submitted at the time of the National Phase Entry on March 26, 2002. Applicant hereby avers that this second submission of the Preliminary Amendment is textually identical to that originally filed on March 26, 2002. Applicant resubmits this document to conform with the statement made on page 1 of the enclosed Declaration and Power of Attorney for Patent Application: *...and was amended by Preliminary Amendment submitted herewith.*

Please enter the following Amendment before calculation of claims fees for submission of this application.

AMENDMENT

In the Specification:

Please **add** at page 13, following line 2:

The disclosure provided by the claims of WO 01/23104, namely pages 64-109, is hereby incorporated by reference.

In the Claims:

*Second Submission of Preliminary Amendment
U.S. Patent Application 10/089,025*

Please **cancel** claims 1 to 223 of the International Application without prejudice.

Please **enter** claims 224-242 submitted herewith. No new matter has been introduced into the claims.

224. A method of causing plural input signals representing respective channels to appear to emanate from respective different positions in space, said method comprising:

- providing a sound reflective or resonant surface at each of said positions in space;

- providing an array of output transducers distal from said positions in space;
- and

- directing, using said array of output transducers, sound waves of each channel towards the respective position in space to cause said sound waves to be re-transmitted by said reflective or resonant surface;

- said step of directing comprising:

- obtaining, in respect of each transducer, a delayed replica of each input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space such that the sound waves of the channel are directed towards the position in space in respect of that channel;

- summing, in respect of each transducer, the respective delayed replicas of each input signal to produce an output signal; and

- routing the output signals to the respective transducers.

225. A method according to claim 224, wherein said step of obtaining, in respect of each output transducer, a delayed replica of the input signal comprises:

- replicating said input signal said predetermined number times to obtain a replica signal in respect of each output transducer;

*Second Submission of Preliminary Amendment
U.S. Patent Application 10/089,025*

delaying each replica of said input signal by said respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space.

226. A method according to claim 224 further comprising:

calculating, before said delaying step, the respective delays in respect of each input signal replica by:

determining the distance between each output transducer and the position in space in respect of that input signal;

deriving respective delay values such that the sound waves from each transducer for a single channel arrive at said position in space simultaneously.

227. A method according to claim 224 further comprising:

inverting one of said plural input signals;

obtaining, in respect of each output transducer, a delayed replica of said inverted input signal delayed by a respective delay selected in accordance with the position in the array of the respective transducer, so that sound waves derived from said inverted input signal are directed at a position in space so as to cancel out at least partially sound waves derived from that input signal at that position in space.

228. A method according to claim 227, wherein said step of obtaining, in respect of each output transducer, a delayed replica of said inverted input signal comprises:

replicating said inverted input signal said predetermined number times to obtain a replica signal in respect of each output transducer;

delaying each replica of said inverted input signal by a respective predetermined delay selected in accordance with the position in the array of the respective output transducer.

*Second Submission of Preliminary Amendment
U.S. Patent Application 10/089,025*

229. A method according to claim 227 wherein said inverted input signal is scaled so that the sound waves derived from said inverted input signal substantially cancel sound waves derived from that input signal at said position in space.

230. A method according to claim 229, wherein said scaling is selected by determining, in respect of the input signal which has been inverted, the magnitude of sound waves at said position in space and selecting said scaling so that sound waves derived from said inverted input signal have substantially the same magnitude at that position.

231. A method according to claim 224 wherein at least one of said surfaces is provided by a wall of a room or other permanent structure.

232. An apparatus for causing plural input signals representing respective channels to appear to emanate from respective different positions in space, said apparatus comprising:

- a sound reflective or resonant surface at each of said positions in space;
- an array of output transducers distal from said positions in space; and
- a controller for directing, using said array of output transducers, sound waves of each channel towards that channel's respective position in space such that said sound waves are re-transmitted by said reflective or resonant surface;

- said controller comprising:

- replication and delay means arranged to obtain, in respect of each transducer, a delayed replica of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space such that the sound waves of the channel are directed towards the position in space in respect of that input signal;

- adder means arranged to sum, in respect of each transducer, the respective delayed replicas of each input signal to produce an output signal; and

*Second Submission of Preliminary Amendment
U.S. Patent Application 10/089,025*

means to route the output signals to the respective transducers such that the channel sound waves are directed towards the position in space in respect of that input signal.

233. An apparatus according to claim 232, wherein said controller further comprises:

calculation means for calculating the respective delays in respect of each input signal replica by:

determining the distance between each output transducer and the position in space in respect of that input signal;

deriving respective delay values such that the sound waves from each transducer for a single channel arrive at said position in space simultaneously.

234. An apparatus according to claim 232 wherein said controller further comprises:

an inverter for inverting one of said plural input signals;

second replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of said inverted input signal delayed by a respective delay selected in accordance with the position in the array of the respective transducer and a second position in space so that sound waves derived from said inverted input signal are directed at said second position in space so as to cancel out at least partially sound waves derived from that input signal at said second position in space.

235. An apparatus according to claim 234 wherein said controller further comprises a scaler for scaling said inverted input signal so that the sound waves derived from said inverted input signal substantially cancel sound waves derived from that input signal at said second position in space

*Second Submission of Preliminary Amendment
U.S. Patent Application 10/089,025*

236. An apparatus according to claim 232 wherein said surfaces are reflective and have a roughness on the scale of the wavelength of sound frequency it is desired to diffusely reflect.

237. An apparatus according to claim 232 wherein said surfaces are optically-transparent.

238. An apparatus according to claim 233 wherein at least one of said surfaces is a wall of a room or other permanent structure.

239. An apparatus for causing plural input signals representing respective channels to appear to emanate from respective different positions in space, for use with reflective or resonant surfaces at each of said positions in space, said apparatus comprising:

an array of output transducers distal from said positions in space; and

a controller for directing, using said array of output transducers, sound waves of each channel towards that channel's respective position in space such that said sound waves are re-transmitted by said reflective or resonant surface;

said controller comprising:

replication and delay means arranged to obtain, in respect of each transducer, a delayed replica of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space such that the sound waves of the channel are directed towards the position in space in respect of the input signal;

adder means arranged to sum, in respect of each transducer, the respective delayed replicas of each input signal to produce an output signal; and

means to route the output signals to the respective transducers such that the channel sound waves are directed towards the position in space in respect of that input signal.

*Second Submission of Preliminary Amendment
U.S. Patent Application 10/089,025*

240. An apparatus according to claim 239, wherein said controller further comprises:

calculation means for calculating the respective delays in respect of each input signal replica by:

determining the distance between each output transducer and the position in space in respect of that input signal;

deriving respective delay values such that the sound waves from each transducer for a single channel arrive at said position in space simultaneously.

241. An apparatus according to claim 239, wherein said controller further comprises:

an inverter for inverting one of said plural input signals;

second replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of said inverted input signal delayed by a respective delay selected in accordance with the position in the array of the respective transducer and a second position in space so that sound waves derived from said inverted input signal are directed at said second position in space so as to cancel out at least partially sound waves derived from that input signal at said second position in space.

242. An apparatus according to claim 241, wherein said controller further comprises:


an inverter for inverting one of said plural input signals;

second replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of said inverted input signal delayed by a respective delay selected in accordance with the position in the array of the respective transducer and a second position in space so that sound waves derived from said inverted input signal are directed at said second position in space so as to cancel out at least partially sound waves derived from that input signal at said second position in space.

*Second Submission of Preliminary Amendment
U.S. Patent Application 10/089,025*

Applicant invites the Office to direct any questions or comments to the undersigned.

Respectfully submitted,



Gerry J. Elman , Reg. No. 24,404
Attorney for Applicant(s)
Elman & Associates
Customer No. 003775
Phone: 610-892-9580

Date JUNE 21, 2002


The sender has requested notification upon receipt.
 Immediately upon receipt, please telephone:

 Name: _____
 Tel. No.: _____

1-800-222-1811
Tracking Or Pickup Of All Your Packages



2515890795505



**POST OFFICE
TO ADDRESSEE**

UNITED STATES POSTAL SERVICE™

Addresssee Col
Label 11-F July 1

[illegible]

607
777
844

www.usps.gov

FOR PICKUP OR TRACKING CALL 1-800-222-1811

pieces) or drop off your Express Mail® package

FORM PTO-190 (modified) REV 11-2000		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER O17-002	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 10/089,025	
INTERNATIONAL APPLICATION NO PCT/G800/03742		INTERNATIONAL FILING DATE 29 September 2000		PRIORITY DATE CLAIMED 29 September 1999	
TITLE OF INVENTION METHOD AND APPARATUS TO DIRECT SOUND					
APPLICANT(S) FOR DO/EO/US Anthony HOOLEY, Paul Thomas TROUGHTON, Angus Gavin GOUDIE, Irving Alexander BIENEK, Paul Raymond WINDLE					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> 1. <input type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input checked="" type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below. 4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input checked="" type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <ol style="list-style-type: none"> a. <input type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)). 11. <input type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/1PEA/409). 12. <input type="checkbox"/> A copy of the International Search Report (PCT/ISA/210). 					
Items 13 to 20 below concern document(s) or information included:					
<ol style="list-style-type: none"> 13. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 14. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 15. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 16. <input checked="" type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment submission of FIRST Preliminary Amendment. 17. <input type="checkbox"/> A substitute specification. 18. <input type="checkbox"/> A change of power of attorney and/or address letter. 19. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 20. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 21. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 22. <input checked="" type="checkbox"/> Certificate of Mailing by Express Mail 23. <input checked="" type="checkbox"/> Other items or information: 					
Check no. 10698, Declaration and Power of Attorney, 4 sheets; 371 formalities letter, 2 sheets; acknowledgment postcard.					

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.101) 10/089,025	INTERNATIONAL APPLICATION NO. PCT/GB00/03742	ATTORNEY'S DOCKET NUMBER O17-002
--	--	--

24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT = \$0.00				CALCULATIONS PTO USE ONLY	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 \$130.00					
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	19 - 20 =	0	x \$18.00	\$0.00	
Independent claims	3 - 3 =	0	x \$84.00	\$0.00	
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$130.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$130.00	
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30 +				\$0.00	
TOTAL NATIONAL FEE =				\$130.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$130.00	
				Amount to be refunded	\$
				charged	\$

06/20/2006 10:11:11 AM 00000105 10089025

01 F0154 130.00 DP

a. ☒ A check in the amount of **\$130.00** to cover the above fees is enclosed.


b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **05-0845**. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO: Gerry J. Elman, Reg. No. 24, 404 Elman & Associates, Customer No., 003775 Phone: 610-892-9580 Fax: 610-892-9577	SIGNATURE _____ Gerry J. Elman NAME _____ 24, 404 REGISTRATION NUMBER _____ June 21, 2002 DATE _____
---	---

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)			Docket No. 017-002
Applicant(s): Anthony HOOLEY et al			
Serial No. 10/089,025	Filing Date 09/29/2000	Examiner NA	Group Art Unit NA
Invention: METHOD AND APPARATUS TO DIRECT SOUND			
<p>I hereby certify that the following correspondence:</p> <div style="border: 1px solid black; padding: 5px;"> <p>Transmittal Letter, 2 sheets; Notification of Missing Requirements, 2 sheets; Declaration and Power of Attorney, 4 sheets; Check no. 10698, Second Submission of Preliminary Amendmnt^{ent} 8 sheets, acknowledgment postcard.</p> <p style="text-align: center;">(Identify type of correspondence) 8 sheets</p> </div> <p>is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on</p> <p style="text-align: center;">June <u>21</u>, 2002 (Date)</p> <div style="text-align: center;"> <p>Gerry J. Elman (Typed or Printed Name of Person Mailing Correspondence)</p>  (Signature of Person Mailing Correspondence) <p>EL 589 079 555 US (“Express Mail” Mailing Label Number)</p> </div>			

Note: Each paper must have its own certificate of mailing.



UNITED STATES PATENT AND TRADEMARK OFFICE

Commissioner for Patents, Box PC-1
United States Patent and Trademark Office
Washington, D.C. 20231
www.uspto.gov

U.S. APPLICATION NUMBER NO 10/089,025	FIRST NAMED APPLICANT Anthony Hooley	ATTY. DOCKET NO 017-002
--	---	----------------------------

003775
ELMAN & ASSOCIATES
P O BOX 1969
MEDIA, PA 19063-8969

INTERNATIONAL APPLICATION NO PCT/GB00/03742	
1A FILING DATE 09/29/2000	PRIORITY DATE 09/29/1999

CONFIRMATION NO. 9464

371 FORMALITIES LETTER



OC000000008142634

MAY 21

Date Mailed: 05/20/2002

NOTIFICATION OF MISSING REQUIREMENTS UNDER 35 U.S.C. 371 IN THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US)

The following items have been submitted by the applicant or the IB to the United States Patent and Trademark Office as an Elected Office (37 CFR 1.495):

- U.S. Basic National Fees
- Priority Document
- Copy of references cited in ISR
- Copy of the International Application
- Copy of the International Search Report
- Preliminary Amendments
- Request for Immediate Examination

The following items **MUST** be furnished within the period set forth below in order to complete the requirements for acceptance under 35 U.S.C. 371:

- Oath or declaration of the inventors, in compliance with 37 CFR 1.497(a) and (b), identifying the application by the International application number and international filing date.
- **\$130** Surcharge for providing the oath or declaration later than the appropriate 30 months from the priority date (37 CFR 1.492(e)) is required.

ALL OF THE ITEMS SET FORTH ABOVE MUST BE SUBMITTED WITHIN TWO (2) MONTH FROM THE DATE OF THIS NOTICE OR BY 22 or 32 MONTHS (where 37 CFR 1.495 applies) FROM THE PRIORITY DATE FOR THE APPLICATION, WHICHEVER IS LATER. FAILURE TO PROPERLY RESPOND WILL RESULT IN ABANDONMENT.

The time period set above may be extended by filing a petition and fee for extension of time under the provisions of 37 CFR 1.136(a).

SUMMARY OF FEES DUE:

Total additional fees required for this application is \$130 for a Large Entity:

- \$130 Late oath or declaration Surcharge.

Applicant is reminded that any communications to the United States Patent and Trademark Office must be mailed to the address given in the heading and include the U.S. application no. shown above (37 CFR 1.5)

*A copy of this notice **MUST** be returned with the response.*

DEBORAH D WILLIAMS

Telephone: (703) 305-3744

PART 1 - ATTORNEY/APPLICANT COPY

U.S. APPLICATION NUMBER NO.	INTERNATIONAL APPLICATION NO.	ATTY. DOCKET NO
10/089,025	PCT/GB00/03742	017-002

FORM PCT/DO/EO/905 (371 Formalities Notice)

01/089025

-1-

METHOD AND APPARATUS TO DIRECT SOUND

This invention relates to steerable acoustic antennae, and concerns in particular digital electronically-steerable acoustic antennae.

5 Phased array antennae are well known in the art in both the electromagnetic and the ultrasonic acoustic fields. They are less well known, but exist in simple forms, in the sonic (audible) acoustic area. These latter are relatively crude, and the invention seeks to provide improvements related to a superior audio acoustic array capable of being steered so as to direct its output more or less at will.

10 WO 96/31086 describes a system which uses a unary coded signal to drive a an array of output transducers. Each transducer is capable of creating a sound pressure pulse and is not able to reproduce the whole of the signal to be output.

A first aspect of the present invention addresses the problem that it is desirable to be able to shape a sound field.

15 In accordance with the first aspect, there is provided a method of directing sound waves derived from a signal using an array of output transducers, said method comprising:

obtaining, in respect of each output transducer, a delayed replica of the signal, the delayed replica being delayed by a respective delay selected in accordance with
20 the position in the array of the respective transducer and a given direction so as to direct sound waves derived from said signal in said direction;

routing the delayed replicas to the respective output transducers.

Also in accordance with the first aspect of the invention there is a provided a method of creating a sound field having a simulated origin using an array of output
25 transducers, said method comprising:

obtaining, in respect of each output transducer, a delayed replica of an input signal, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer and the position of the simulated origin so as to create a sound field which substantially appears to originate
30 at said simulated origin; and

-2-

routing the delayed replicas to the respective output transducers.

Further, in accordance with the first aspect of the invention, there is provided an apparatus for directing sound waves, said apparatus comprising:

an array of output transducers;

5 replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of the signal, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer and a given direction so as to direct sound waves derived from said signal to be directed substantially in said direction; and

10 means for routing the delayed replicas to the respective output transducers.

Furthermore, in accordance with the first aspect of the invention, there is provided an apparatus to create a sound field having a simulated origin, said apparatus comprising:

an array of output transducers;

15 replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of an input signal, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer and the position of the simulated origin so as to create a sound field which appears to originate at said simulated origin; and

20 means for routing the delayed replicas to the respective output transducers.

Thus, there is provided a method and apparatus for shaping a sound field in an efficient manner.

A second aspect of the invention addresses the problem that it is often desirable to be able to cancel sound waves in some particular direction. This aspect 25 is directed towards the use of a transducer array to cancel sound waves at specified positions.

According to the second aspect of the invention, there is provided a method of cancelling sound waves derived from a signal at a null position using an array of output transducers, said method comprising:

30 obtaining, in respect of each output transducer, a delayed replica of the signal

-3-

to be cancelled, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer and the null position;

- scaling and inverting each of said delayed replica signals; and
- 5 routing the scaled and inverted delayed replicas to the respective output transducers so as to at least partially cancel a sound field at said null position.

Further, in accordance with the second aspect of the present invention, there is provided an apparatus for cancelling sound waves at a null position, said apparatus comprising:

- 10 an array of output transducers;
- replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of the signal to be cancelled, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer and the null position;
- 15 scaler means and inverter means for scaling and inverting each of said delayed replica signals;

means to route the scaled and inverted delayed replicas to the respective output transducers so as to at least partially cancel a sound field at said null position.

This aspect of the invention allows sound waves to be cancelled efficiently.

- 20 A third aspect of the present invention addresses the problem that traditional stereo or surround sound devices have many wires and loudspeaker units with correspondingly set-up times. This aspect therefore relates to the creation of a true stereo or surround-sound field without the wiring and separated loudspeakers traditionally associated with stereo and surround-sound systems.

- 25 Accordingly, the third aspect of the invention provides a method of causing plural input signals representing respective channels to appear to emanate from respective different positions in space, said method comprising:

providing a sound reflective or resonant surface at each of said positions in space;

- 30 providing an array of output transducers distal from said positions in space;

and

directing, using said array of output transducers, sound waves of each channel towards the respective position in space to cause said sound waves to be re-transmitted by said reflective or resonant surface;

5 said step of directing comprising:

obtaining, in respect of each transducer, a delayed replica of each input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space such that the sound waves of the channel are directed towards the position in space in respect of
10 that channel;

summing, in respect of each transducer, the respective delayed replicas of each input signal to produce an output signal; and

routing the output signals to the respective transducers.

Further, in accordance with the third aspect of the invention, there is provided
15 an apparatus for causing plural input signals representing respective channels to appear to emanate from respective different positions in space, said apparatus comprising:

a sound reflective or resonant surface at each of said positions in space;

an array of output transducers distal from said positions in space; and

20 a controller for directing, using said array of output transducers, sound waves of each channel towards that channel's respective position in space such that said sound waves are re-transmitted by said reflective or resonant surface;

said controller comprising:

replication and delay means arranged to obtain, in respect of each transducer,

25 a delayed replica of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space such that the sound waves of the channel are directed towards the position in space in respect of that input signal;

adder means arranged to sum, in respect of each transducer, the respective

30 delayed replicas of each input signal to produce an output signal; and

-5-

means to route the output signals to the respective transducers such that the channel sound waves are directed towards the position in space in respect of that input signal.

- A fourth aspect of the invention addresses the problem that it may be useful
5 to know exactly where a transducer is located so that some special effects can be achieved.

In accordance with the fourth aspect of the invention there is provided a method of detecting the position of an input transducer in the vicinity of an array of output transducers, said method comprising:

- 10 outputting respective distinguishable sonic test signals from at least three output transducers of said array;
receiving each of said test signals at said input transducer;
detecting the time between outputting each test signal and receiving it at the input transducer; and
15 using said detected times to calculate the apparent position of said input transducer by triangulation.

Further in accordance with the fourth aspect of the invention there is provided a method of detecting the position of an output transducer situated in the vicinity of an array of input transducers, said method comprising:

- 20 outputting a sonic test signal from said output transducer;
receiving said test signal at at least three input transducers in said array;
detecting the time between outputting said test signal and receiving it at each input transducer; and
using said detected times to calculate the apparent position of said output
25 transducer by triangulation.

Also in accordance with the fourth aspect of the invention there is provided an apparatus operable to detect the position of an input transducer situated in the vicinity of an array of output transducers, said apparatus comprising:

- an array of output transducers;
30 an input transducer;

-6-

a controller connected to said array of output transducers and said input transducer, said controller being arranged to route respective distinguishable sonic test signals to at least three of said output transducers and to detect the time between outputting each test signal and receiving it at the input transducer so as to calculate
5 the apparent position of said input transducer by triangulation.

Furthermore in accordance with the fourth aspect of the invention there is provided an apparatus operable to detect the position of an output transducer situated in the vicinity of an array of input transducers, said apparatus comprising:

- an array of input transducers;
- 10 an output transducer;

a controller connected to said array of input transducers and said output transducer, said controller being arranged to route a sonic test signal to said output transducer and to detect the time between outputting said test signal and receiving it at at least three of said input transducers so as to calculate the apparent position of
15 said input transducer by triangulation.

This aspect therefore allows to the location of the position of a microphone near an array of loudspeakers or the position of a loudspeaker near an array of microphones. This locating function may be usefully combined with the sound direction and null positioning functions.

20 A fifth aspect of the invention relates to shaping a sound field in respect of a single frequency band of an input signal only.

In accordance with the fifth aspect of the invention there is provided a method of transmitting sound waves using an array of output transducers, said method comprising:

- 25 frequency dividing an input signal into at least two frequency bands;
- obtaining, in respect of each output transducer of said array of output transducers, a delayed replica of a first band of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer such that the sound field derived from the first band of
30 said input signal is shaped in a desired way;

-7-

obtaining, in respect of each output transducer, a replica of a second band of the input signal;

summing respective replicas of said first and second bands to create respective output signals in respect of each transducer; and

5 routing said output signals to respective transducers.

Further in accordance with the fifth aspect of the invention there is provided a method of transmitting sound waves using an array of output transducers, said method comprising:

frequency dividing an input signal into at least two frequency bands;

10 obtaining, in respect of each output transducer of said array of output transducers, a delayed replica of a first band of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and a first selected direction;

scaling and inverting said delayed replicas of said first band of said input
15 signal;

obtaining, in respect of each output transducer, a replica of a second band of the input signal;

summing respective replicas of said first and second bands to create respective output signals in respect of each transducer; and

20 routing said output signals to respective transducers such that sound waves derived from the first band of said input signal are at least partially cancelled in a particular direction.

Also in accordance with the fifth aspect of the invention there is provided an apparatus to transmit sound waves comprising:

25 an array of output transducers;

frequency divider means for dividing an input signal into at least two frequency bands;

replication and delay means to obtain, in respect of each output transducer of said array of output transducers, a delayed replica of a first band of the input signal
30 delayed by a respective delay selected in accordance with the position in the array of

-8-

the respective output transducer;

said replication and delay means being arranged further to obtain, in respect of each output transducer, a replica of a second band of the input signal;

- 5 adder means for summing respective replicas of said first and second bands to create respective output signals in respect of each transducer; and
 means to route said output signals to respective transducers.

Furthermore in accordance with the fifth aspect of the invention there is provided an apparatus to transmit sound waves comprising:

- an array of output transducers;
10 frequency divider means for frequency dividing an input signal into at least two frequency bands;

 replication and delay means to obtain, in respect of each output transducer of said array of output transducers, a delayed replica of a first band of the input signal delayed by a respective delay selected in accordance with the position in the array of

- 15 the respective output transducer and a first selected direction;

 scaler means and inverter means for scaling and inverting said delayed replicas of said first band of said input signal;

 said replicator and delaying means being arranged further to obtain, in respect of each output transducer, a replica of a second band of the input signal;

- 20 an adder for summing respective replicas of said first and second bands to create respective output signals in respect of each transducer; and

 means to route said output signals to respective transducers such that sound waves derived from the first band of said input signal are at least partially cancelled in a particular direction.

- 25 The above described frequency splitting is particularly useful when nulling because it is desirable not to transmit anti-beams in respect of low frequencies because it can cause cancellation over an excessively large area.

- The sixth aspect of the invention addresses the problem that an operator may have difficulty in locating where sound waves are focussed, and thus has difficulty in
30 setting up the system.

-9-

In accordance with the sixth aspect of the present invention there is provided a method of indicating the position of focus of sound, said method comprising:

- shining a first beam of light in a first direction and a second beam of light in a second direction from separated sources so that the beams intersect at a first position
- 5 in space; and
- focussing first sound waves derived from a first input signal at said first position in space.

- Further in accordance with the sixth aspect of the present invention there is provided an apparatus for allowing a user to select where sound waves are focussed,
- 10 said apparatus comprising:

- at least one output transducer arranged to receive a first input signal and output sound waves derived from said first input signal;
- a first light source for shining a first light beam in a selectable first direction;
- a second light source for shining a second light beam in a selectable second
- 15 direction; and
- a controller connected to said output transducer and said first and second light sources, said controller controlling said first and second directions in response to user selections and controlling said at least one output transducer to cause sound waves derived from said first input signal to be focussed at a first position in space where
- 20 said light beams intersect.

The sixth aspect of the invention allows the use of visible light beams to indicate where a signal is being focussed. This is particularly useful when setting up a system to achieve a desired effect.

- A seventh aspect of the invention addresses the problem that signals can be
- 25 clipped or distorted when more than one input signal is routed to a output transducer.

In accordance with the seventh aspect of the present invention there is provided a method of limiting at least one output signal generated from a first and second signal, said method comprising:

- windowing said first signal to create a first windowed portion comprising
- 30 consecutive samples of said first signal;

-10-

determining the magnitude of the largest sample in said windowed portion of said first signal;

windowing said second signal to create a second windowed portion comprising consecutive samples of said second signal;

- 5 determining the magnitude of the largest sample in said windowed portion of said second signal;

summing together said largest samples from said first and second windowed portions to obtain a first control signal;

- 10 attenuating the magnitude of said first and second signals in accordance with the magnitude of said control signal; and

generating said at least one output signal from said first and second signals.

Further in accordance with the seventh aspect of the present invention there is provided a signal limiting device comprising:

- 15 a first buffer for storing a series of consecutive samples of a first signal;
a second buffer for storing a series of consecutive samples of a second signal;
analysing means for determining the maximum value stored in each buffer at each sampling clock period;

an adder for adding said maximum values so as to obtain a control signal;

- 20 an attenuator for attenuating each of said first and second signals by an amount in accordance with said control signal; and
means to generate an output signal from said first and second signals.

Thus, the seventh aspect provides that input signals are appropriately scaled to avoid any clipping or distortion in a simple and effective manner.

- An eighth aspect of the invention addresses the problem that output
25 transducers of an array may fail causing undesirable beam steering effects. This aspect therefore relates to the detection of, and mitigation of the effects of, a failed output transducer in an array.

- In accordance with the eighth aspect of the invention there is provided a method of detecting failed transducers in an array of output transducers, said method
30 comprising:

-11-

routing a test signal to each output transducer of the array; and
analysing a signal obtained at an input transducer in the vicinity of said array
of output transducers to determine whether or not each output transducer has failed.

A ninth aspect of the invention addresses the problem that an operator is
5 required to select where beams are steered to or where sound appears to come from.

In accordance with the ninth aspect of the invention there is provided a
method of reproducing an audio signal, said method comprising:

decoding an information signal associated with said audio signal:

processing said audio signal according to the information signal decoded in

10 said decoding steps:

reproducing said processed audio signal.

Also in accordance with the ninth aspect of the invention there is provided a
method comprising:

deciding on how a sound field comprising an audio signal should be shaped

15 during reproduction; and

coding said information signal according to the result of said decision.

Further in accordance with the ninth aspect of the invention there is provided
a device for reproducing an audio signal comprising:

an input terminal for inputting an audio signal;

20 an input terminal for inputting an information signal;

means of decoding the information signal;

a replicator and delaying means arranged to obtain, in respect of each output
transducer of an array of output transducers, a delayed replica of the input signal
delayed by a respective delay selected in accordance with the position in the array of
25 the respective output transducer and in accordance with the decoded information
signal;

means to route each of said delayed replica audio signals to a respective
output transducer so that a sound field is achieved in accordance with said
information signal.

30 Furthermore in accordance with the ninth aspect of the invention there is

-13-

fulfilment of the second priority detracts from fulfilment of the first priority only by the amount identified.

Generally, the invention is applicable to a preferably fully digital steerable acoustic phased array antenna (a Digital Phased-Array Antennae, or DPAA) system comprising a plurality of spatially-distributed sonic electroacoustic transducers (SETs) arranged in a two-dimensional array and each connected to the same digital signal input *via* an input signal Distributor which modifies the input signal prior to feeding it to each SET in order to achieve the desired directional effect.

The various possibilities inherent in this, and the versions that are actually preferred, will be seen from the following:-

The SETs are preferably arranged in a plane or curved surface (a Surface), rather than randomly in space. They may also, however, be in the form of a 2-dimensional stack of two or more adjacent sub-arrays - two or more closely-spaced parallel plane or curved surfaces located one behind the next.

Within a Surface the SETs making up the array are preferably closely spaced, and ideally completely fill the overall antenna aperture. This is impractical with real circular-section SETs but may be achieved with triangular, square or hexagonal section SETs, or in general with any section which tiles the plane. Where the SET sections do not tile the plane, a close approximation to a filled aperture may be achieved by making the array in the form of a stack of arrays - ie, three-dimensional - where at least one additional Surface of SETs is mounted behind at least one other such Surface, and the SETs in the or each rearward array radiate between the gaps in the frontward array(s).

The SETs are preferably similar, and ideally they are identical. They are, of course, sonic - that is, audio - devices, and most preferably they are able uniformly to cover the entire audio band from perhaps as low as (or lower than) 20Hz, to as much as 20KHz or more (the Audio Band). Alternatively, there can be used SETs of different sonic capabilities but together covering the entire range desired. Thus, multiple different SETs may be physically grouped together to form a composite SET (CSET) wherein the groups of different SETs together can cover the Audio

-14-

Band even though the individual SETs cannot. As a further variant, SETs each capable of only partial Audio Band coverage can be not grouped but instead scattered throughout the array with enough variation amongst the SETs that the array as a whole has complete or more nearly complete coverage of the Audio Band.

- 5 An alternative form of CSET contains several (typically two) identical transducers, each driven by the same signal. This reduces the complexity of the required signal processing and drive electronics while retaining many of the advantages of a large DPAA. Where the position of a CSET is referred to hereinafter, it is to be understood that this position is the centroid of the CSET as a whole, i.e. the centre of gravity of all of the individual SETs making up the CSET.

- 10 Within a Surface the spacing of the SETs or CSET (hereinafter the two are denoted just by SETs) - that is, the general layout and structure of the array and the way the individual transducers are disposed therein - is preferably regular, and their distribution about the Surface is desirably symmetrical. Thus, the SETs are most
- 15 preferably spaced in a triangular, square or hexagonal lattice. The type and orientation of the lattice can be chosen to control the spacing and direction of side-lobes.

- Though not essential, each SET preferably has an omnidirectional input/output characteristic in at least a hemisphere at all sound wavelengths which it
- 20 is capable of effectively radiating (or receiving).

- Each output SET may take any convenient or desired form of sound radiating device (for example, a conventional loudspeaker), and though they are all preferably the same they could be different. The loudspeakers may be of the type known as pistonic acoustic radiators (wherein the transducer diaphragm is moved by a piston)
- 25 and in such a case the maximum radial extent of the piston-radiators (eg, the effective piston diameter for circular SETs) of the individual SETs is preferably as small as possible, and ideally is as small as or smaller than the acoustic wavelength of the highest frequency in the Audio Band (eg in air, 20KHz sound waves have a wavelength of approximately 17mm, so for circular pistonic transducers, a maximum
- 30 diameter of about 17mm is preferable).

-15-

The overall dimensions of the or each array of SETs in the plane of the array are very preferably chosen to be as great as or greater than the acoustic wavelength in air of the lowest frequency at which it is intended to significantly affect the polar radiation pattern of the array. Thus, if it is desired to be able to beam or steer frequencies as low as 300Hz, then the array size, in the direction at right angles to each plane in which steering or beaming is required, should be at least $c_s / 300 = 1.1$ metre (where c_s is the acoustic sound speed).

The invention is applicable to fully digital steerable sonic/ audible acoustic phased array antenna system, and while the actual transducers can be driven by an analogue signal most preferably they are driven by a digital power amplifier. A typical such digital power amplifier incorporates: a PCM signal input; a clock input (or a means of deriving a clock from the input PCM signal); an output clock, which is either internally generated, or derived from the input clock or from an additional output clock input; and an optional output level input, which may be either a digital (PCM) signal or an analogue signal (in the latter case, this analogue signal may also provide the power for the amplifier output). A characteristic of a digital power amplifier is that, before any optional analogue output filtering, its output is discrete valued and stepwise continuous, and can only change level at intervals which match the output clock period. The discrete output values are controlled by the optional output level input, where provided. For PWM-based digital amplifiers, the output signal's average value over any integer multiple of the input sample period is representative of the input signal. For other digital amplifiers, the output signal's average value tends towards the input signal's average value over periods greater than the input sample period. Preferred forms of digital power amplifier include bipolar pulse width modulators, and one-bit binary modulators.

The use of a digital power amplifier avoids the more common requirement - found in most so-called "digital" systems - to provide a digital-to-analogue converter (DAC) and a linear power amplifier for each transducer drive channel, and therefore the power drive efficiency can be very high. Moreover, as most moving coil acoustic transducers are inherently inductive, and mechanically act quite effectively as low

-16-

pass filters, it may be unnecessary to add elaborate electronic low-pass filtering between the digital drive circuitry and the SETs. In other words, the SETs can be directly driven with digital signals.

The DPAA has one or more digital input terminals (Inputs). When more than one input terminal is present, it is necessary to provide means for routing each input signal to the individual SETs.

This may be done by connecting each of the inputs to each of the SETs *via* one or more input signal Distributors. At the most basic, an input signal is fed to a single Distributor, and that single Distributor has a separate output to each of the SETs (and the signal it outputs is suitably modified, as discussed hereinafter, to achieve the end desired). Alternatively, there may be a number of similar Distributors, each taking the, or part of the, input signal, or separate input signals, and then each providing a separate output to each of the SETs (and in each case the signal it outputs is suitably modified, with the Distributor, as discussed hereinafter, to achieve the end desired). In this latter case - a plurality of Distributors each feeding all the SETs - the outputs from each Distributor to any one SET have to be combined, and conveniently this is done by an adder circuit prior to any further modification the resultant feed may undergo.

The Input terminals preferably receive one or more digital signals representative of the sound or sounds to be handled by the DPAA (Input Signals). Of course, the original electrical signal defining the sound to be radiated may be in an analogue form, and therefore the system of the invention may include one or more analogue-to-digital converters (ADCs) connected each between an auxiliary analogue input terminal (Analogue Input) and one of the Inputs, thus allowing the conversion of these external analogue electrical signals to internal digital electrical signals, each with a specific (and appropriate) sample rate F_s . And thus, within the DPAA, beyond the Inputs, the signals handled are time-sampled quantized digital signals representative of the sound waveform or waveforms to be reproduced by the DPAA.

A digital sample-rate-converter (DSRC) is required to be provided between an Input and the remaining internal electronic processing system of the DPAA if the

-17-

- signal presented at that input is not synchronised with the other components of and input signals to, the DPAA. The output of each DSRC is clocked in-phase with and at the same rate as all the other DSRCs, so that disparate external signals from the Inputs with different clock rates and/or phases can be brought together within the
- 5 DPAA, synchronised, and combined meaningfully into one or more composite internal data channels. The DSRC may be omitted on one "master" channel if that input signal's clock is then used as the master clock for all the other DSRC outputs. Where several external input signals already share a common external or internal data timing clock then there may effectively be several such "master" channels.
- 10 No DSRC is required on any analogue input channel as its analogue to digital conversion process may be controlled by the internal master clock for direct synchronisation.
- The DPAA of the invention incorporates a Distributor which modifies the input signal prior to feeding it to each SET in order to achieve the desired directional
- 15 effect. A Distributor is a digital device, or piece of software, with one input and multiple outputs. One of the DPAA's Input Signals is fed into its input. It preferably has one output for each SET; alternatively, one output can be shared amongst a number of the SETs or the elements of a CSET. The Distributor sends generally differently modified versions of the input signal to each of its outputs. The
- 20 modifications can be either fixed, or adjustable using a control system. The modifications carried out by the distributor can comprise applying a signal delay, applying amplitude control and/or adjustably digitally filtering. These modifications may be carried out by signal delay means (SDM), amplitude control means (ACM) and adjustable digital filters (ADFs) which are respectively located within the
- 25 Distributor. It is to be noted that the ADFs can be arranged to apply delays to the signal by appropriate choice of filter coefficients. Further, this delay can be made frequency dependent such that different frequencies of the input signal are delayed by different amounts and the filter can produce the effect of the sum of any number of such delayed versions of the signal. The terms "delaying" or "delayed" used herein
- 30 should be construed as incorporating the type of delays applied by ADFs as well as

SDMs. The delays can be of any useful duration including zero, but in general, at least one replicated input signal is delayed by a non-zero value.

The signal delay means (SDM) are variable digital signal time-delay elements. Here, because these are not single-frequency, or narrow frequency-band, *phase shifting* elements but true time-delays, the DPAA will operate over a broad frequency band (eg the Audio Band). There may be means to adjust the delays between a given input terminal and each SET, and advantageously there is a separately adjustable delay means for each Input/SET combination.

The minimum delay possible for a given digital signal is preferably as small or smaller than T_s , that signal's sample period; the maximum delay possible for a given digital signal should preferably be chosen to be as large as or larger than T_c , the time taken for sound to cross the transducer array across its greatest lateral extent, D_{max} , where $T_c = D_{max} / c_s$, where c_s is the speed of sound in air. Most preferably, the smallest incremental change in delay possible for a given digital signal should be no larger than T_s , that signal's sample period. Otherwise, interpolation of the signal is necessary.

The amplitude control means (ACM) is conveniently implemented as digital amplitude control means for the purposes of gross beam shape modification. It may comprise an amplifier or attenuator so as to increase or decrease the magnitude of an output signal. Like the SDM, there is preferably an adjustable ACM for each Input/SET combination. The amplitude control means is preferably arranged to apply differing amplitude control to each signal output from the Distributor so as to counteract for the fact that the DPAA is of finite size. This is conveniently achieved by normalising the magnitude of each output signal in accordance with a predefined curve such as a Gaussian curve or a raised cosine curve. Thus, in general, output signals destined for SETs near the centre of the array will not be significantly affected but those near to the perimeter of the array will be attenuated according to how near to the edge of the array they are.

Another way of modifying the signal uses digital filters (ADF) whose group delay and magnitude response vary in a specified way as a function of frequency

-19-

(rather than just a simple time delay or level change) - simple delay elements may be used in implementing these filters to reduce the necessary computation. This approach allows control of the DPAA radiation pattern as a function of frequency which allows control of the radiation pattern of the DPAA to be adjusted separately in different frequency bands (which is useful because the size in wavelengths of the DPAA radiating area, and thus its directionality, is otherwise a strong function of frequency). For example, for a DPAA of say 2m extent its low frequency cut-off (for directionality) is around the 150Hz region, and as the human ear has difficulty in determining directionality of sounds at such a low frequency it may be more useful not to apply "beam-steering" delays and amplitude weighting at such low frequencies but instead to go for an optimized output level. Additionally, the use of filters may also allow some compensation for unevenness in the radiation pattern of each SET.

The SDM delays, ACM gains and ADF coefficients can be fixed, varied in response to User input, or under automatic control. Preferably, any changes required while a channel is in use are made in many small increments so that no discontinuity is heard. These increments can be chosen to define predetermined "roll-off" and "attack" rates which describe how quickly the parameters are able to change.

If different SETs in the array have different inherent sensitivities then it may be preferred to calibrate out such differences using an analogue method associated directly with the SETs themselves and/or their power driving circuitry, in order to minimise any loss in resolution that might result from utilising digital calibration further back in the signal processing path. This refinement is particularly useful where low-bit-number high-over-sample-rate digital coding is used prior to the points in the system where multiple input-channel-signals are brought together (added) in combination for application to individual SETs.

Where more than one Input is provided - ie there are I inputs numbered 1 to I and where there are N SETs, numbered 1 to N , it is preferable to provide a separate and separately-adjustable delay, amplitude control and/or filter means $D_{m,n}$ (where $1 \leq m \leq I$ and $1 \leq n \leq N$, between each of the I inputs and each of the N SETs) for each combination. For each SET there are thus I delayed or filtered digital signals, one

-20-

from each of the Inputs *via* the separate Distributor, to be combined before application to the SET. There are in general *N* separate SDMs, ACMs and/or ADFs in each Distributor, one for each SET. As noted above, this combination of digital signals is conveniently done by digital algebraic addition of the *I* separate delayed signals - ie the signal to each SET is a linear combination of separately modified signals from each of the *I* Inputs. It is because of this requirement to perform digital addition of signals originating from more than one Input that the DSRCs (see above) are desirable, to synchronize these external signals, as it is generally not meaningful to perform digital addition on two or more digital signals with different clock rates and/or phases.

The input digital signals are preferably passed through an oversampling-noise-shaping-quantizer (ONSQ) which reduces their bit-width and increases their sample-rate whilst keeping their signal to noise ratio (SNR) in the acoustic band largely unchanged. The principle reason for doing this is to allow the digital transducer drive-circuitry ("digital amplifiers") to operate with feasible clock rates. For example, if the drives are implemented as digital PWM, then if the signal bit-width to the PWM circuit is *b* bits, and its sample rate *s* samples per second, then the PWM clock-rate *p* needs to be $p = 2^b s$ Hz - eg for *b* = 16, and *s* = 44 KHz, then $p = 2.88\text{GHz}$, which is quite impractical at the present level of technology. If, however, the input signal were to be oversampled 4 times and the bit width reduced to 8 bits, then $p = 2^8 \times 4 \times 44\text{KHz} = 45\text{MHz}$, which is easily achievable with standard logic or FPGA circuitry. In general, use of an ONSQ increases the signal bit rate. In the example given the original bit rate $R_0 = 16 \times 44000 = 704\text{Kbits/sec}$, whilst the oversampled bit rate is $R_q = 8 \times 44000 \times 4 = 1.408\text{Mbits/sec}$, (which is twice as high). If the ONSQ is connected between an Input and the inputs to the digital delay generators (DDG), then the DDG will in general require more storage capacity to accommodate the higher bit rate; if, however, the DDGs operate at the Input bit-width and sample rate (thus requiring the minimum storage capacity in the DDGs), and instead an ONSQ is connected between each DDG output and SET digital driver, then one ONSQ is required for every SET, which increases the complexity of the

area of the DPAA), and provides manual control over all the major functions of the DPAA. Such a control system would be most useful to provide the following functions:

- 1) selection of which Input(s) are to be connected to which Distributor, which might also be termed a "Channel";
- 2) control of the focus position and/or beam shape of each Channel;
- 3) control of the individual volume-level settings for each Channel; and
- 4) an initial parameter set-up using the Handset having a built-in microphone (see later).

10 There may also be:

- means to interconnect two or more such DPAA's in order to coordinate their radiation patterns, their focussing and their optimization procedures;
- means to store and recall sets of delays (for the DDGs) and filter coefficients (for the ADFs);

15 The invention will be further described, by way of non-limitative example only, with reference to the accompanying schematic drawings, in which:-

Figure 1 shows a representation of a simple single-input apparatus;

Figures 2A and 2B show front and perspective views of a multiple surface array of transducers;

20 Figures 3A and 3B show a front views of a possible CSET configuration and a front view of an array comprised of multiple types of SET;

Figures 4A and 4B show front views of rectangular and hexagonal arrays of SETs;

Figure 5 is a block diagram of a multiple-input apparatus;

25 Figure 6 is a block diagram of an input stage having its own master clock;

Figure 7 is a block diagram of an input stage which recovers an external clock;

Figure 8 is a block diagram of a general purpose Distributor;

30 Figure 9 shows an open backed array of output transducers operated to direct sound to listeners in a symmetrical fashion;

Figure 10 is a block diagram of a linear amplifier and a digital amplifier used in preferred embodiments of the present invention;

Figure 11 is a block diagram showing the points at which ONSQ stages can be incorporated into apparatus similar to that shown in Figure 5;

- 5 Figure 12 is a block diagram showing where linear and non-linear compensation may be incorporated into an apparatus similar to that shown in Figure 1;

Figure 13 is a block diagram showing where linear and non-linear compensation can be incorporated into a multiple input apparatus;

- 10 Figure 14 shows the interconnection of several arrays with common control and input stages;

Figure 15 shows a Distributor in accordance with the first aspect of the present invention;

- 15 Figures 16A to 16D show four types of sound field which may be achieved using the apparatus of the first aspect of the present invention;

Figure 17 shows apparatus for selectively nulling a signal output by a loudspeaker;

Figure 18 shows apparatus for selectively nulling a signal output by an array of output transducers;

- 20 Figure 19 is a block diagram of apparatus to implement selective nulling;
Figure 20 shows the focussing of a null on a microphone to reduce howling;
Figure 21 shows a plan view of an array of output transducers and reflective/resonant screens to achieve a surround sound effect;

- 25 Figure 22 illustrates apparatus to locate the position of an input transducer using triangulation;

Figure 23 illustrates in plan view the effect of wind on a sound field and apparatus to reduce this effect;

Figure 24 shows in plan view an array of three input transducers which have an input null located at point O;

- 30 Figures 25A to F are time-line diagrams explaining how signals originating

-24-

from O are given less weight;

Figures 26A to F are time-line diagrams explaining how signals originating at X are negligibly affected by the input nulling;

Figure 27 is a block diagram showing how test signal generation and analysis
5 can be incorporated into apparatus similar to that shown in Figure 5;

Figure 28 is a block diagram showing two ways of inserting test signals into an output signal;

Figure 29 is a block diagram showing apparatus capable of shaping different frequencies in different ways;

10 Figure 30 is a plan view of apparatus which allows the visualisation of focus points;

Figure 31 is a block diagram of apparatus to limit two input signals to avoid clipping or distortion; and

Figure 32 is a block diagram of a reproducing apparatus capable of extracting
15 sound field shaping information associated with an audio signal.

The description and Figures provided hereinafter necessarily describe the invention using block diagrams, with each block representing a hardware component or a signal processing step. The invention could, in principle, be realised by building
20 separate physical components to perform each step, and interconnecting them as shown. Several of the steps could be implemented using dedicated or programmable integrated circuits, possibly combining several steps in one circuit. It will be understood that in practice it is likely to be most convenient to perform several of the signal processing steps in software, using Digital Signal Processors (DSPs) or
25 general purpose microprocessors. Sequences of steps could then be performed by separate processors or by separate software routines sharing a microprocessor, or be combined into a single routine to improve efficiency.

The Figures generally only show audio signal paths; clock and control connections are omitted for clarity unless necessary to convey the idea. Moreover,
30 only small numbers of SETs, Channels, and their associated circuitry are shown, as

-25-

diagrams become cluttered and hard to interpret if the realistically large numbers of elements are included.

Before the respective aspects of the present invention are described, it is useful to describe embodiments of the apparatus which are suitable for use in accordance with any of the respective aspects.

The block diagram of Figure 1 depicts a simple DPAA. An input signal (101) feeds a Distributor (102) whose many (6 in the drawing) outputs each connect through optional amplifiers (103) to output SETs (104) which are physically arranged to form a two-dimensional array (105). The Distributor modifies the signal sent to each SET to produce the desired radiation pattern. There may be additional processing steps before and after the Distributor, which are illustrated in turn later. Details of the amplifier section are shown in Figure 10.

Figure 2 shows SETs (104) arranged to form a front Surface (201) and a second Surface (202) such that the SETs on the rear Surface radiate through the gaps between SETs in the front Surface.

Figure 3 shows CSETs (301) arranged to make an array (302), and two different types of SET (303, 304) combined to make an array (305). In the case of Figure 3a, the "position" of the CSET may be thought to be at the centre of gravity of the group of SETs.

Figure 4 shows two possible arrangements of SETs (104) forming a rectangular array (401) and a hex array (402).

Figure 5 shows a DPAA with two input signals (501,502) and three Distributors (503-505). Distributor 503 treats the signal 501, whereas both 504 and 505 treat the input signal 502. The outputs from each Distributor for each SET are summed by adders (506), and pass through amplifiers 103 to the SETs 104. Details of the input section are shown in Figures 6 and 7.

Figure 6 shows a possible arrangement of input circuitry with, for illustrative purposes, three digital inputs (601) and one analogue input (602). Digital receiver and analogue buffering circuitry has been omitted for clarity. There is an internal master clock source (603), which is applied to DSRCs (604) on each of the digital

the DPAA will be directed to a well-separated section of the same audience at the right of the auditorium. In this manner useful acoustic power may be derived from both the front and rear radiation fields of the transducers. Figure 9 illustrates the use of an open-backed DPAA (901) to convey a signal to left and right sections of an audience (902,903), exploiting the rear radiation. The different parts of the audience receive signals with opposite polarity. This system may be used to detect a microphone position (see later) in which case any ambiguity can be resolved by examining the polarity of the signal received by the microphone.

Figure 10 shows possible power amplifier configurations. In one option, the input digital signal (1001), possibly from a Distributor or adder, passes through a DAC (1002) and a linear power amplifier (1003) with an optional gain/volume control input (1004). The output feeds a SET or group of SETs (1005). In a preferred configuration, this time illustrated for two SET feeds, the inputs (1006) directly feed digital amplifiers (1007) with optional global volume control input (1008). The global volume control inputs can conveniently also serve as the power supply to the output drive circuitry. The discrete-valued digital amplifier outputs optionally pass through analogue low-pass filters (1009) before reaching the SETs (1005).

Figure 11 shows that ONSQ stages can be incorporated in to the DPAA either before the Distributors, as (1101), or after the adders, as (1102), or in both positions. Like the other block diagrams, this shows only one elaboration of the DPAA architecture. If several elaborations are to be used at once, the extra processing steps can be inserted in any order.

Figure 12 shows the incorporation of linear compensation (1201) and/or non-linear compensation (1202) into a single-Distributor DPAA. Non-linear compensation can only be used in this position if the Distributor applies only pure delay, not filtering or amplitude changes.

Figure 13 shows the arrangement for linear and/or non-linear compensation in a multi-Distributor DPAA. The linear compensation 1301 can again be applied at the input stage before the Distributors, but now each output must be separately non-

linearly compensated 1302. This arrangement also allows non-linear compensation where the Distributor filters or changes the amplitude of the signal. The use of compensators allows relatively cheap transducers to be used with good results because any shortcomings can be taken into account by the digital compensation. If compensation is carried out before replication, this has the additional advantage that only one compensator per input signal is required.

Figure 14 illustrates the interconnection of three DPAA's (1401). In this case, the inputs (1402), input circuitry (1403) and control systems (1404) are shared by all three DPAA's. The input circuitry and control system could either be separately housed or incorporated into one of the DPAA's, with the others acting as slaves. Alternatively, the three DPAA's could be identical, with the redundant circuitry in the slave DPAA's merely inactive. This set-up allows increased power, and if the arrays are placed side by side, better directivity at low frequencies.

15 First Aspect of the Invention

The first aspect of the Invention will now be generally described with reference to Figure 15 and Figures 16A-D. The apparatus of the first aspect has the general structure shown in Figure 1. Figure 15 shows the Distributor (102) of this embodiment in further detail.

As can be seen from Figure 5, the input signal (101) is routed to a replicator (1504) by means of an input terminal (1514). The replicator (1504) has the function of copying the input signal a pre-determined number of times and providing the same signal at said pre-determined number of output terminals (1518). Each replica of the input signal is then supplied to the means (1506) for modifying the replicas. In general, the means (1506) for modifying the replicas includes signal delay means (1508), amplitude control means (1510) and adjustable digital filter means (1512). However, it should be noted that the amplitude control means (1510) is purely optional. Further, one or other of the signal delay means (1508) and adjustable digital filter (1512) may also be dispensed with. The most fundamental function of

-29-

the means (1506) to modify replicas is to provide that different replicas are in some sense delayed by generally different amounts. It is the choice of delays which determines the sound field achieved when the output transducers (104) output the various delayed versions of the input signal (101). The delayed and preferably
5 otherwise modified replicas are output from the Distributor (102) via output terminals (1516).

As already mentioned, the choice of respective delays carried by each signal delay means (1508) and/or each adjustable digital filter (1512) critically influences the type of sound field which is achieved. The first aspect of the invention relates to
10 four particularly advantageous sound fields and linear combinations thereof.

First Embodiment

A sound field according to the first embodiment of the first aspect of the
15 invention is shown in Figure 16A.

The array (105) comprising the various output transducers (104) is shown in plan view. Other rows of output transducers may be located above or below the illustrated row as shown, for example, in Figures 4A or 4B.

In this embodiment, the delays applied to each replica by the various signal
20 delay means (508) are set to be the same value, eg 0 (in the case of a plane array as illustrated), or to values that are a function of the shape of the Surface (in the case of curved surfaces). This produces a roughly parallel "beam" of sound representative of the input signal (101), which has a wave front F parallel to the array (105). The radiation in the direction of the beam (perpendicular to the wave front) is
25 significantly more intense than in other directions, though in general there will be "side lobes" too. The assumption is that the array (105) has a physical extent which is one or several wavelengths at the sound frequencies of interest. This fact means that the side lobes can generally be attenuated or moved if necessary by adjustment of the ACMs or ADFs.

30 The mode of operation in this first embodiment may generally be thought of

-30-

as one in which the array (105) mimics a very large traditional loudspeaker. All of the individual transducers (104) of the array (105) are operated in phase to produce a symmetrical beam with a principle direction perpendicular to the plane of the array. The sound field obtained will be very similar to that which would be obtained if a single large loudspeaker having a diameter D was used.

Second Embodiment

The first embodiment might be thought of as a specific example of the more general second embodiment.

In this embodiment, the delay applied to each replica by the signal delay means (1508) or adjustable digital filter (1512) is made to vary such that the delay increases systematically amongst the transducers (104) in some chosen direction across the surface of the array. This is illustrated in Figure 15B. The delays applied to the various signals before they are routed to their respective output transducer (104) may be visualised in Figure 15B by the dotted lines extending behind the transducer. A longer dotted line represents a longer delay time. In general, the relationship between the dotted lines and the actual delay time will be $d_n = t_n * c$ where d represents the length of the dotted line, t represents the amount of delay applied to the respective signal and c represents the speed of sound in air.

As can be seen from Figure 15B, the delays applied to the output transducers increase linearly as you move from left to right in Figure 15B. Thus, the signal routed to the transducer (104a) has substantially no delay and thus is the first signal to exit the array. The signal routed to the transducer (104b) has a small delay applied so this signal is the second to exit the array. The delays applied to the transducers (104c, 104d, 104e etc) successively increase so that there is a fixed delay between the outputs of adjacent transducers.

Such a series of delays produces a roughly parallel "beam" of sound similar to that produced in the first embodiment except that now the beam is angled by an amount dependent on the amount of systematic delay increase that was used. For

- 30 The calculations needed to obtain sound wave focussing can be generalised as

-32-

follows:-

$$\text{focal point position vector, } \mathbf{f} = \begin{bmatrix} f_x \\ f_y \\ f_z \end{bmatrix}$$

$$\text{nth transducer position, } \mathbf{p}_n = \begin{bmatrix} p_{nx} \\ p_{ny} \\ p_{nz} \end{bmatrix}$$

$$\text{transit time for nth transducer, } t_n = \frac{1}{c} \sqrt{(\mathbf{f} - \mathbf{p}_n)^T (\mathbf{f} - \mathbf{p}_n)}$$

$$5 \quad \text{required delay for each transducer, } d_n = k - t_n$$

where k is a constant offset to ensure that all delays are positive and hence realisable.

The position of the focal point may be varied widely almost anywhere in front of the DPAA by suitably choosing the set of delays as previously described.

10

Fourth Embodiment

Figure 16D shows a fourth embodiment of the first aspect wherein yet another rationale is used to determine the delays applied to the signals routed to each output transducer. In this embodiment, Huygens wavelet theorem is invoked to simulate a sound field which has an apparent origin O. This is achieved by setting the signal delay created by the signal delay means (1508) or the adaptive digital filter (1512) to be equal to the sound travel time from a point in space behind the array to the respective output transducer. These delays are illustrated by the dotted lines in

20 Figure 16D.

-33-

It will be seen from Figure 16D that those output transducers located closest to the simulated origin position output a signal before those transducers located further away from the origin position. The interference pattern set up by the waves emitted from each of the transducers creates a sound field which, to listeners in the near field in front of the array, appears to originate at the simulated origin.

Hemispherical wave fronts are shown in Figure 16D. These sum to create the wave front F which has a curvature and direction of movement the same as a wave front would have if it had originated at the simulated origin. Thus, a true sound field is obtained. The equation for calculating the delays is now:-

$$d_n = t_n - j$$

where t_n is defined as in the third embodiment and j is an arbitrary offset.

It can be seen, therefore, that the method according to the first aspect of the invention involves using the replicator (1504) to obtain N replica signals, one for each of the N output transducers. Each of these replicas are then delayed (perhaps by filtering) by respective delays which are selected in accordance with both the position of the respective output transducer in the array and the effect to be achieved. The delayed signals are then routed to the respective output transducers to create the appropriate sound field.

The distributor (102) preferably comprises separate replicating and delaying means so that signals may be replicated and delays may be applied to each replica. However, other configurations are included in the present invention, for example, an input buffer with N taps may be used, the position of the tap determining the amount of delay.

The system described is a linear one and so it is possible to combine any of the above four effects by simply adding together the required delayed signals for a particular output transducer. Similarly, the linear nature of the system means that several inputs may each be separately and distinctly focussed or directed in the manner described above, giving rise to controllable and potentially widely separated

regions where distinct sound fields (representative of the signals at the different inputs) may be established remote from the DPAA proper. For example, a first signal can be made to appear to originate some distance behind the DPAA and a second signal can be focussed on a position some distance in front of the DPAA.

5

Second Aspect of the Invention

The second aspect of the invention relates to the use of a DPAA not to direct or simulate the origin of sound, but to direct "anti-sound" so that quiet spots may be created in the sound field.

10

Such a method according to the second aspect can be particularly useful in a public address (PA) system which can suffer from "howl" or positive electro-acoustic feedback whenever a loudspeaker system is driven by amplified signals originating from microphones physically disposed near the loudspeakers.

15

In this condition, a loudspeaker's output reaches (often in a fairly narrow frequency band), and is picked up by, a microphone, and is then amplified and fed to the loudspeaker, and from which it again reaches the microphone ... and where the received signal's phase and frequency matches the present microphone signal's output the combined signal rapidly builds up until the system saturates, and emits a loud and unpleasant whistling, or "howling" noise.

20

Anti-feedback or anti-howlround devices are known for reducing or suppressing acoustic feedback. They can operate in a number of different ways. For example, they can reduce the gain - the amount of amplification - at specific frequencies where howl-round occurs, so that the loop gain at those frequencies is less than unity. Alternatively, they can modify the phase at such frequencies, so that the loudspeaker output tends to cancel rather than add to the microphone signal.

25

Another possibility is the inclusion in the signal path from microphone to loudspeaker of a frequency-shifting device (often producing a frequency shift of just a few hertz), so that the feedback signal no longer matches the microphone signal.

30

None of these methods is entirely satisfactory, and the second aspect of the

invention proposes a new way, appropriate in any situation where the microphone/loudspeaker system employs a plurality of individual transducer units arranged as an array and in particular where the loudspeaker system utilises a multitude of such transducer units as disclosed in, say, the Specification of

5 International Patent Publication WO 96/31,086. More specifically, the second aspect of the invention suggests that the phase and/or the amplitude of the signal fed to each transducer unit be arranged such that the effect on the array is to produce a significantly reduced "sensitivity" level in one or more chosen direction (along which may actually or effectively lie a microphone) or at one or more chosen points. In

10 other words, the second aspect of the invention proposes in one embodiment that the loudspeaker unit array produces output nulls which are directed wherever there is a microphone that could pick up the sound and cause howl, or where for some reason it is undesirable to direct a high sound level.

Sound waves may be cancelled (ie. nulls can be formed) by focussing or

15 directing inverted versions of the signal to be cancelled to particular positions. The signal to be cancelled can be obtained by calculation or measurement. Thus, the method of the second aspect of the present invention generally uses the apparatus of Figure 1 to provide a directional sound field provided by an appropriate choice of delays. The signals output by the various transducers (104) are inverted and scaled

20 versions of the sound field signal so that they tend to cancel out signals in the sound field derived from the uninverted input signal. An example of this mechanism is shown in Figure 17. Here, an input signal (101) is input to a controller (1704). The controller routes the input signal to a traditional loudspeaker (1702), possibly after applying a delay to the input signal. The loudspeaker (1702) outputs sound waves

25 derived from the input signal to create a sound field (1706). The DPAA (104) is arranged to cause a substantially silent spot within this sound field at a so-called "null" position P. This is achieved by calculating the value of sound pressure at the point P due to the signal from loudspeaker (1702). This signal is then inverted and focussed at the point P (see Figure 17) using the methods similar to focussing normal

30 sound signals described in accordance with the first aspect of the invention. Almost

total cancelling may be achieved by calculating or measuring the exact level of the sound field at position P and scaling the inverted signal so as to achieve more precise cancellation.

The signal in the sound field which is to be cancelled will be almost exactly the same as the signal supplied to the loudspeaker (1702) except it will be affected by the impulse response of the loudspeaker as measured at the nulling point (it is also affected by the room acoustics, but this will be neglected for the sake of simplicity). It is therefore useful to have a model of the loudspeaker impulse response to ensure that the nulling is carried out correctly. If a correction to account for the impulse response is not used, it may in fact reinforce the signal rather than cancelling it (for example if it is 180° out of phase). The impulse response (the response of the loudspeaker to a sharp impulse of infinite magnitude and infinitely small duration, but nonetheless having a finite area) generally consists of a series of values represented by samples at successive times after the impulse has been applied. These values may be scaled to obtain the coefficients of an FIR filter which can be applied to the signal input to the loudspeaker (1702) to obtain a signal corrected to account for the impulse response. This corrected signal may then be used to calculate the sound field at the nulling point so that appropriate anti-sound can be beamed. The sound field at the nulling point is termed the "signal to be cancelled".

Since the FIR filter mentioned above causes a delay in the signal flow, it is useful to delay everything else to obtain proper synchronisation. In other words, the input signal to the loudspeaker (1702) is delayed so that there is time for the FIR filter to calculate the sound field using the impulse response of the loudspeaker (1702).

The impulse response can be measured by adding test signals to the signal sent to the loudspeaker (1702) and measuring them using an input transducer at the nulling point. Alternatively, it can be calculated using a model of the system.

Another embodiment of this aspect of the invention is shown in Figure 18. Here, instead of using a separate loudspeaker (1702) to create the initial sound field, the DPAA is also used for this purpose. In this case, the input signal is replicated

and routed to each of the output transducers. The magnitude of the sound signal at the position P is calculated quite easily, since the sound at this position is due solely to the DPAA output. This is achieved by firstly calculating the transit time from each of the output transducers to the nulling point. The impulse response at the

5 nulling point consists of the sum of each impulse response for each output transducer, delayed and filtered as the input signal will create the initial sound field, then further delayed by the transit time to the nulling point and attenuated due to $1/r^2$ distance effects.

Strictly speaking, this impulse response should be convolved (ie filtered) with

10 the impulse response of the individual array transducers. However, the nulling signal is reproduced through those same transducers so it undergoes the same filtering at that stage. If we are using a measured (see below), rather than a model based impulse response for the nulling, then it is usually necessary to deconvolve the measured response with the impulse response of the output transducers.

15 The signal to be cancelled obtained using the above mentioned considerations is inverted and scaled before being again replicated. These replicas then have delays applied to them so that the inverted signal is focussed at the position P. It is usually necessary to further delay the original (uninverted) input signal so that the inverted (nulling) signal can arrive at the nulling point at the same time as the sound field it is

20 designed to null. For each output transducer, the input signal replica and the respective delayed inverted input signal replica are added together to create an output signal for that transducer.

Apparatus to achieve this effect is shown in Figure 19. The input signal (101) is routed to a first Distributor (1906) and a processor (1910). From there it is routed

25 to an inverter (1902) and the inverted input signal is routed to a second Distributor (1908). In the first Distributor (1906) the input signal is passed without delay, or with a constant delay to the various adders (1904). Alternatively, a set of delays may be applied to obtain a directed input signal. The processor (1910) processes the input signal to obtain a signal representative of the sound field that will be established due

30 to the input signal (taking into account any directing of the input signal). As already

-38-

mentioned, this processing will in general comprise using the known impulse response of the various transducers, the known delay time applied to each input signal replica and the known transit times from each transducer to the nulling point to determine the sound field at the nulling point. The second Distributor (1908) replicates and delays the inverted sound field signal and the delayed replicas are routed to the various adders (1904) to be added to the outputs from the first Distributor. A single output signal is then routed to each of the output transducers (104). As mentioned, the first distributor (1906) can provide for directional or simulated origin sound fields. This is useful when it is desired to direct a plurality of soundwaves in a particular direction, but it is necessary to have some part of the resulting field which is very quiet.

Since the system is linear, the inverting carried out in the inverter (1902) could be carried out on each of the replicas leaving the second distributor. Clearly though, it is advantageous to perform the inverting step before replicating since only one inverter (1902) is then required. The inversion step can also be incorporated into the filter. Furthermore, if the Distributor (1906) incorporates ADFs, both the initial sound field and the nulling beam can be produced by it, by summing the filter coefficients relating to the initial sound field and to the nulling beam.

A null point may be formed within sound fields which have not been created by known apparatus if an input transducer (for example a microphone) is used to measure the sound at the position of interest. Figure 20 shows the implementation of such a system. A microphone (2004) is connected to a controller (2002) and is arranged to measure the sound level at a particular position in space. The controller (2002) inverts the measured signal and creates delayed replicas of this inverted signal so as to focus the inverted signal at the microphone location. This creates a negative feedback loop in respect of the sound field at the microphone location which tends to ensure quietness at the microphone location. Of course, there will be a delay between the actual sound (for example due to a noisy room) detected by the microphone (2004) and the soundwaves representing the inverted detected signal arriving at the microphone location. However, for low frequencies, this delay is

tolerable. To account for this effect, the signal output by the output transducers (104) of the DPAA could be filtered so as to only comprise low frequency components.

The above embodiments describe the concept of "nulling" using an inverted (and possibly scaled) sound field signal which is focussed at a point. However, more
5 general nulling could comprise directing a parallel beam using a method similar to that described with reference to the first and second embodiments of the first aspect.

The advantages of the array or the invention are manifold. One such advantage is that sound energy may be selectively NOT directed, and so "quiet spots" may be produced, whilst leaving the energy directed into the rest of the surrounding
10 region largely unchanged (though, as already mentioned, it may additionally be shaped to form a positive beam or beams). This is particularly useful in the case where the signals fed to the loudspeaker are derived totally or in part from microphones in the vicinity of the loudspeaker array: if an "anti-beam" is directed from the speaker array towards such a microphone, then the loop-gain of the system,
15 in this direction or at this point alone, is reduced, and the likelihood of howl-round may be reduced; ie. a null or partial null is located at or near to the microphone. Where there are multiple microphones, as in common on stages, or at conferences, multiple anti-beams may be so formed and directed at each of the microphones.

A third benefit is also seen, when, where one or more regions of the listening
20 area is adversely affected by reflections off walls or other boundaries, anti-beams may be directed at those boundaries to reduce the adverse effects of any reflections therefrom, thus improving the quality of sound in the listening area.

A problem may arise with the speaker system of the invention where the wavelength of the sound being employed is at an extreme compared with the physical
25 dimensions of the array. Thus, where the array-extent in one or both of the principal 2D dimensions of the transducer array is such that it is smaller than one or a few wavelengths of sound below a given frequency (F_c) within the useful range of use of the system, then its ability to produce significant directionality in either or both of those dimensions will be somewhat or even greatly reduced. Moreover, where the
30 wavelength is very large compared to one or both of the associated dimensions, the

-40-

directionality will be essentially zero. Thus, the array is in any case ineffective for directional purposes below frequency F_c . Worse, however, is that an unwanted side-effect of the transducer array being used to produce anti-beams is that, at frequencies much below F_c , the output energy in all directions can be unintentionally much

5 reduced, because the transducer array, considered as a radiator, now has multiple positively- and negatively-phased elements spatially separated by much less than a wavelength, producing destructive interference the effect of which is largely to cancel the radiation in many if not all directions in the far field - which is not what is desired in the production of anti-beams. It should be noted that normal low

10 frequency signals may be steered without much effect on the output power. It is only when nulling that the above described power problem emerges.

To deal with this special case, then, the driving signal to the transducer array should first be split into frequencies-below-frequency F_s (BandLow) and frequencies-above- F_s (BandHigh), where F_s is somewhere in the region of F_c (ie.

15 where the array starts to interfere destructively in the far field due to its small size compared to the wavelength of signals of frequency below F_s). Then, the BandHigh signals are fed to the transducer array elements in the standard manner via the delaying elements, whilst the BandLow signals are directed separately around the delay elements and fed directly to all the output transducers in the array (summed

20 with the output of its respective BandHigh signal at each transducer). In this manner, the lower frequencies below F_s are fed in-phase across the whole array to the elements and do not destructively interfere in the far field, whilst the higher frequencies above F_s are beamed and anti-beamed by the one or more groups of SDMs to produce useful beaming and anti-beaming in the far-field, with the lower

25 frequency output now remaining intact. Embodiments of the invention which utilise such frequency dividing are described later with reference to the fifth aspect of the invention.

The apparatus of Figure 20 and of Figure 18 may be combined such that the input signal detected at the microphone (2004) is generally output by the transducers

30 (104) of the DPAA but with cancellation of this output signal at the location of the

-41-

microphone itself. As discussed, there would normally be probability of howl-round (positive electro-acoustic feedback) were the system gain to be set above a certain level. Often this limiting level is sufficiently low that users of the microphone have to be very close for adequate sensitivity, which can be problematical. However, with the DPAA set to produce nulls or anti-beams in the direction of the microphone, this undesirable effect can be greatly reduced, and the system gain increased to a higher level giving more useful sensitivity.

Third Aspect of the Invention

The third aspect of the invention relates to the use of a DPAA system to create a surround sound or stereo effect using only a single sound emitting apparatus similar to the apparatus already described in relation to the first and second aspects of the invention. Particularly, the third aspect of the invention relates to directing different channels of sound in different directions so that the soundwaves impinge on a reflective or resonant surface and are re-transmitted thereby.

This third aspect of the invention addresses the problem that where the DPAA is operated outdoors (or any other place having substantially anechoic conditions) an observer needs to move close to those regions in which sound has been focussed in order to easily perceive the separate sound fields. It is otherwise difficult for the observer to locate the separate sound fields which have been created.

If an acoustic reflecting surface, or alternatively an acoustically resonant body which re-radiates absorbed incident sound energy, is placed in such a focal region, it re-radiates the focussed sound, and so effectively becomes a new sound source, remote from the DPAA, and located at the focal region. If a plane reflector is used then the reflected sound is predominantly directed in a specific direction; if a diffuse reflector is present then the sound is re-radiated more or less in all directions away from the focal region on the same side of the reflector as the focussed sound is incident from the DPAA. Thus, if a number of distinct sound signals representative of distinct input signals are focussed to distinct focal regions by the DPAA in the

-42-

manner described, and within each focal region is placed such a reflector or resonator so as to redirect the sound from each focal region, then a true multiple separated-source sound radiator system may be constructed using a single DPAA of the design described herein. It is not essential to focus sound, instead sound can be directed in the manner of the second embodiment of the first aspect of the present invention.

Where the DPAA is operated in the manner previously described with multiple separated focussed beams - ie. with sound signals representative of distinct input signals focussed in distinct and separated regions - in non-anechoic conditions (such as in a normal room environment) wherein there are multiple hard and/or predominantly sound reflecting boundary surfaces, and in particular where those focussed regions are directed at one or more of the reflecting boundary surfaces, then using only his normal directional sound perceptions an observer is easily able to perceive the separate sound fields, and simultaneously locate each of them in space at their respective separate focal regions, due to the reflected sounds (from the boundaries) reaching the observer from those regions.

It is important to emphasise that in such a case the observer perceives real separated sound fields which in no way rely on the DPAA introducing artificial psycho-acoustic elements into the sound signals. Thus, the position of the observer is relatively unimportant for true sound location, so long as he is sufficiently far from the near-field radiation of the DPAA. In this manner, multi-channel "surround-sound" can be achieved with only one physical loudspeaker (the DPAA), making use of the natural boundaries found in most real environments.

Where similar effects are to be produced in an environment lacking appropriate natural reflecting boundaries, similar separated multi-source sound fields can be achieved by the suitable placement of artificial reflecting or resonating surfaces where it is desired that a sound source should seem to originate, and then directing beams at those surfaces. For example, in a large concert hall or outside environment optically-transparent plastic or glass panels could be placed and used as sound reflectors with little visual impact. Where wide dispersion of the sound from those regions is desired, a sound scattering reflector or broadband resonator could be

-43-

introduced instead (this would be more difficult but not impossible to make optically transparent).

Figure 21 illustrates the use of a single DPAA and multiple reflecting or resonating surfaces (2102) to present multiple sources to listeners (2103). As it does not rely on psychoacoustic cues, the surround sound effect is audible throughout the listening area.

In the case where focussing, rather than mere directing, is used, a spherical reflector having a diameter roughly equivalent to the size of the focus point can be used to achieve diffuse reflection over a wide angle. To further enhance the diffuse reflection effect, the surfaces should have a roughness on the scale of the wavelength of sound frequency it is desired to diffuse.

This third aspect of the invention can be used in conjunction with the second aspect of the invention to provide that anti-beams of the other channels may be directed towards the reflector associated with a given channel. So, taking the example of a stereo (2-channel system), channel 1 may be focussed at reflector 1 and channel 2 may be focussed at reflector 2 and appropriate nulling would be included to null channel 1 at reflector 2 and null channel 2 at reflector 1. This would ensure that only the correct channels have significant energy at the respective reflective surface.

The great advantage of this aspect of the present invention is that all of the above may be achieved with a single DPAA apparatus, the output signals for each transducer being built up from summations of delayed replicas of (possibly corrected and inverted) input signals. Thus, much wiring and apparatus traditionally associated with surround sound systems is dispensed with.

Fourth Aspect of the Invention

The fourth aspect of the invention relates to the use of microphones (input transducers) and test signals to locate the position of a microphone in the vicinity of an array of output transducers or the position of a loudspeaker in the vicinity of an

array of microphones.

In accordance with this aspect, one or more microphones are provided that are able to sense the acoustic emission from the DPAA, and which are connected to the DPAA control electronics either by wired or wireless means. The DPAA

- 5 incorporates a subsystem arranged to be able to compute the location of the microphone(s) relative to one or more DPAA SETs by measuring the propagation times of signals from three or more (and in general from all of the) SETs to the microphone and triangulating, thus allowing the possibility of tracking the microphone movements during use of the DPAA without interfering with the
- 10 listener's perception of the programme material sound. Where the DPAA SET array is open-backed - ie. it radiates from both sides of the transducer in a dipole like manner - the potential ambiguity of microphone position, in front of or behind the DPAA, may be resolved by examination of the phase of the received signals (especially at the lower frequencies).

- 15 The speed of sound, which changes with air temperature during the course of a performance, affecting the acoustics of the venue and the performance of the speaker system, can be determined in the same process by using an additional triangulation point. The microphone locating may either be done using a specific test pattern (eg. a pseudo-random noise sequence or sequence of short pulses to each of
- 20 the SETs in turn, where the pulse length t_p is as short or shorter than the spatial resolution r_s required, in the sense that $t_p \leq r_s / c_s$) or by introducing low level test signals (which may be designed to be inaudible) with the programme material being broadcast by the DPAA, and then detecting these by cross-correlation.

- A control system may be added to the DPAA that optimises (in some desired
- 25 sense) the sound field at one or more specified locations, by altering the delays applied by the SDMs and/or the filter coefficients of the ADFs. If the previously described microphones are available, then this optimisation can occur either at set-up time - for instance during pre-performance use of the DPAA) - or during actual use. In the latter case, one or more of the microphones may be embedded in the handset
- 30 used otherwise to control the DPAA, and in this case the control system may be

-45-

designed actively to track the microphone in real-time and so continuously to optimise the sound at the position of the handset, and thus at the presumed position of at least one of the listeners. By building into the control system a model (most likely a software model) of the DPAA and its acoustic characteristics, plus optionally
5 a model of the environment in which it is currently situated (ie. where it is in use, eg. a listening room), the control system may use this model to estimate automatically the required adjustments to the DPAA parameters to optimise the sound at any user-specified positions to reduce any troublesome side lobes.

The control system just described can additionally be made to adjust the
10 sound level at one or more specific locations - eg. positions where live performance microphones are situated, which are connected to the DPAA, or positions where there are known to be undesired reflecting surfaces - to be minimised, creating "dead-zones". In this way unwanted mic/DPAA feedback can be avoided, as can unwanted room reverberations. This possibility has been discussed in the section relating to the
15 second aspect of the invention.

By using buried test-signals - that is, additional signals generated in the DPAA electronics which are designed to be largely imperceptible to the audience, and typified by low level pseudo-random noise sequences, which are superimposed on the programme signals - one or more of the live performance microphones can be
20 spatially tracked (by suitable processing of the pattern of delays between said microphones and the DPAA transducers). This microphone spatial information may in turn be used for purposes such as positioning the "dead-zones" wherever the microphones are moved to (note that the buried test-signals will of necessity be of non-zero amplitude at the microphone positions).

Figure 22 illustrates a possible configuration for the use of a microphone to specify locations in the listening area. The microphone (2201) is connected an analogue or digital input (2204) of the DPAA (105) via a radio transmitter (2202) and receiver (2203). A wired or other wirefree connection could instead be used if more convenient. Most of the SETs (104) are used for normal operation or are silent.
30 A small number of SETs (2205) emit test signals, either added to or instead of the

-46-

usual programme signal. The path lengths (2206) between the test SETs and the microphone are deduced by comparison of the test signals and microphone signal, and used to deduce the location of the microphone by triangulation. Where the signal to noise ratio of the received test signals is poor, the response can be integrated over several seconds.

In outdoor performances, wind has a significant impact on the performance of loudspeaker systems. The direction of propagation of sound is affected by winds. In particular, wind blowing across an audience, at perpendicular to the desired direction of propagation of the sound, can cause much of the sound power to be delivered outside the venue, with insufficient coverage within. Figure 23 illustrates this problem. The area 2302 surrounded by the dotted line indicates the sound field shape of the DPAA (105) in the absence of wind. Wind W blows from the right so that the sound field 2304 is obtained, which is a skewed version of field 2302.

With a DPAA system, the propagation of the microphone location finding signals are affected in the same manner by crosswinds. Hence, if a microphone M is positioned in the middle of the audience area, but a crosswind was blowing from the west, it would appear to the location finding system that the microphone is west of the audience area. Taking the example of Figure 23, the wind W causes the test signals to take a curved path from the DPAA to the microphone. This causes the system to erroneously locate the microphone at position P, west of the true position M. To account for this, the radiation pattern of the array way is adjusted to optimise coverage around the apparent microphone location P, to compensate for the wind, and give optimum coverage in the actual audience area. The DPAA control system can make these adjustments automatically during the course of a performance. To ensure stability of the control system, only slow changes must be made. The robustness of the system can be improved using multiple microphones at known locations throughout the audience area. Even when the wind changes, the sound field can be kept substantially constantly directed in the desired way.

Where it is desired to position an apparent source of sound remote from the DPAA as previously described in relation to the third aspect of the invention (by the

As a final step, these nulling signals are subtracted from the respective input signals to provide a series of modified input signals. As you might expect for the case of sound originating at point O, the nulling signals in the present example are

exactly the same as input signals and so three modified signals having substantially zero magnitude are obtained. Thus, it can be seen that the input nulling method of the fourth aspect of the present invention serves to cause the DPAA to ignore signals emitted from position O where an input null is located.

- 5 Signals emanating from positions in the sound field other than O will not be reduced to zero as will be shown by considering how the method of the present invention processes signals obtained at the input transducers due to a sound source located at position X in Figure 24. Sound emanating from position X arrives firstly at transducer (2404a) then at transducer (2404b) and finally at transducer (2404c).
- 10 This is idealised by the sound pulses shown in Figure 26A. According to the input nulling method, these received signals are delayed by amounts which focus sensitivity on the position O. Thus, the signal at transducer (2404a) is not delayed, the signal at transducer (2404b) is delayed by 0.5 seconds and the signal at transducer (2404b) is delayed by 1 second. The signals which result from this are shown in
- 15 Figure 25B.

- These three signals are then added together to achieve the output signal shown in Figure 26C. This output signal is then divided by the approximate number of input transducers so as to reduce its magnitude. The resulting signal is shown in Figure 26D. This resulting signal is then replicated and each replica is advanced by
- 20 the amounts which the input signals were delayed by to achieve the signals shown in Figure 26B. The three resulting signals are shown in Figure 26E. These nulling signals Na, Nb and Nc are then subtracted from the original input signals to obtain modified input signals Ma, Mb and Mc. As can be seen from the resulting signal shown in Figure 26F, the input pulses are changed only negligibly by the
- 25 modification. The input pulses themselves are reduced to two thirds of their original level and other negative pulses of one third of the original pulse level have been added as noise. For a system using many input transducers, the pulse level will in general be reduced by $(N-1)/(N)$ of a pulse and the noise will in general have a magnitude of $(1/N)$ of a pulse. Thus, for say one hundred transducers, the effect of
- 30 the modification is negligible when the sound comes from a point distal from the

-50-

nulling position O. The signals of 26F can then be used for conventional beamforming to recover the signal from X.

The various test signals used with the fourth aspect of the present invention are distinguishable by applying a correlation function to the various input signals.

5 The test signal to be detected is cross-correlated with any input signal and the result of such cross-correlation is analysed to indicate whether the test signal is present in the input signal. The pseudo-random noise signals are each independent such that no one signal is a linear combination of any number of other signals in the group. This ensures that the cross-correlation process identifies the test signals in question.

10 The test signals may desirably be formulated to have a non-flat spectrum so as to maximise their inaudibility. This can be done by filtering pseudo-random noise signals. Firstly, they may have their power located in regions of the audio band to which the ear is relatively insensitive. For example, the ear has most sensitivity at around 3.5KHz so the test signals preferably have a frequency spectrum with
15 minimal power near this frequency. Secondly, the masking effect can be used by adaptively changing the test signals in accordance with the programme signal, by putting much of the test signal power in parts of the spectrum which are masked.

Figure 27 shows a block diagram of the incorporation of test signal generation and analysis into a DPAA. Test signals are both generated and analysed
20 in block (2701). It has as inputs the normal input channels 101, in order to design test signals which are imperceptible due to a masking by the desired audio signal, and microphone inputs 2204. The usual input circuitry, such as DSRCs and/or ADCs have been omitted for clarity. The test signals are emitted either by dedicated SETs (2703) or shared SETs 2205. In the latter case the test signal is incorporated into the
25 signal feeding each SET in a test signal insertion step (2702).

Figure 28 shows two possible test signal insertion steps. The programme input signals (2801) come from a Distributor or adder. The test signals (2802) come from block 2701 in Figure 27. The output signals (2803) go to ONSQs, non-linear compensators, or directly to amplifier stages. In insertion step (2804), the test signal
30 is added to the programme signal. In insertion step (2805), the test signal replaces

-51-

the programme signal. Control signals are omitted.

Fifth Aspect of the Invention

5 As has already been discussed in relation to the second aspect, it can sometimes be advantageous to split an input signal into two or more frequency bands and deal with these frequency bands separately in terms of the directivity which is achieved using the DPAA apparatus. Such a technique is useful not only when beam directing, but also when cancelling sound at a particular location to create nulls.

10 Figure 29 illustrates the general apparatus for selectively beaming distinct frequency bands.

Input signal 101 is connected to a signal splitter/combiner (2903) and hence to a low-pass-filter (2901) and a high-pass-filter (2902) in parallel channels. Low-pass-filter (2901) is connected to a Distributor (2904) which connects to all the
15 adders (2905) which are in turn connected to the N transducers (104) of the DPAA (105).

High-pass-filter (2902) connects to a device (102) which is the same as device (102) in Figure 2 (and which in general contains within it N variable-amplitude and variable-time delay elements), which in turn connects to the other
20 ports of the adders (2905).

The system may be used to overcome the effect of far-field cancellation of the low frequencies, due to the array size being small compared to a wavelength at those lower frequencies. The system therefore allows different frequencies to be treated differently in terms of shaping the sound field. The lower frequencies pass between
25 the source/detector and the transducers (2904) all with the same time-delay (nominally zero) and amplitude, whereas the higher frequencies are appropriately time-delayed and amplitude-controlled for each of the N transducers independently. This allows anti-beaming or nulling of the higher frequencies without global far-field nulling of the low frequencies.

30 It is to be noted that the method according to the fifth aspect of the invention

-52-

can be carried out using the adjustable digital filters (512). Such filters allow different delays to be accorded to different frequencies by simply choosing appropriate values for the filter coefficients. In this case, it is not necessary to separately split up the frequency bands and apply different delays to the replicas
5 derived from each frequency band. An appropriate effect can be achieved simply by filtering the various replicas of the single input signal.

Sixth Aspect of the Invention

10 The sixth aspect of the invention addresses the problem that a user of the DPAA system may not always be easily able to locate where sound of a particular channel is being focussed at any particular time. This problem is alleviated by providing two steerable beams of light which can be caused to cross in space at the point where sound is being focussed. Advantageously, the beams of light are under
15 the control of the operator and the DPAA controller is arranged to cause sound channel focussing to occur wherever the operator causes the light beams to intersect. This provides a very easy to set up system which does not rely on creating mathematical models of the room or other complex calculations.

If two light beams are provided, then they may be steered automatically by
20 the DPAA electronics such that they intersect in space at or near the centre of the focal region of a channel, again providing a great deal of useful set-up feedback information to the operator.

It is useful to make the colours of the two beams different, and different
primaries may be best, eg. red and green, so that in the overlap region a third colour
25 is perceived.

Means to select which channel settings control the positions of the light beams should also be provided and these may all be controlled from the handset.

Where more than two light beams are provided, the focal regions of multiple channels may be high-lighted simultaneously by the intersection locations in space of
30 pairs of the steerable light beams.

-53-

Small laser beams, particularly solid-state diode lasers, provide a useful source of collimated light.

Steering is easily achieved through small steerable mirrors driven by galvos or motors, or alternatively by a WHERM mechanism as described in the specification of the British Patent Application No. 0003,136.9.

Figure 30 illustrates the use of steerable light beams (3003, 3004) emitted from projectors (3001, 3002) on a DPAA to show the point of focus (3005). If projector (3001) emits red light and (3002) green light, then yellow light will be seen at the point of focus.

Seventh Aspect of the Invention

If multiple sources are used simultaneously in a DPAA, to avoid clipping or distortion, it can be important to ensure that none of the summed signals presented to the SETs exceed the maximum excursion of the SET pistons or the full-scale digital level (FSDL) of the summing units, digital amplifiers, ONSQs or linear or non-linear compensators. This can be achieved straightforwardly by either scaling down or peak limiting each of the I input signals so that no peak can exceed 1/Ith of the full scale level. This approach caters for the worst case, where the input signals peak at the FSDL together, but severely limits the output power available to a single input. In most applications this is unlikely to occur except during occasional brief transients (such as explosions in a movie soundtrack). Better use can therefore be made of the dynamic range of the digital system if higher levels are used and overload avoided by peak limiting only during such simultaneous peaks.

A digital peak limiter is a system which scales down an input digital audio signal as necessary to prevent the output signal from exceeding a specified maximum level. It derives a control signal from the input signal, which may be subsampled to reduce the required computation. The control signal is smoothed to prevent discontinuities in the output signal. The rate at which the gain is decreased before a peak (the attack time constant) and returned to normal afterwards (the release time

constant) are chosen to minimise the audible effects of the limiter. They can be factory-preset, under the control of the user, or automatically adjusted according to the characteristics of the input signal. If a small amount of latency can be tolerated, then the control signal can "look ahead" (by delaying the input signal but not the control signal), so that the attack phase of the limiting action can anticipate a sudden peak.

Since each SET receives sums of the input signals with different relative delays, it is not sufficient simply to derive the control signal for a peak limiter from a sum of the input signals, as peaks which do not coincide in one sum may do so in the delayed sums presented to one or more SETs. If independent peak limiters are used on each summed signal then, when some SETs are limited and others are not, the radiation pattern of the array will be affected.

This effect can be avoided by linking the limiters so that they all apply the same amount of gain reduction. This, however, is complex to implement when N is large, as it generally will be, and does not prevent overload at the summing point.

An alternative approach according to the seventh aspect of the invention is the Multichannel Multiphase Limiter (MML), a diagram of which is shown in Figure 31. This apparatus acts on the input signals. It finds the peak level of each input signal in a time window spanning the range of delays currently implemented by the SDMs, then sums these I peak levels to produce its control signal. If the control signal does not exceed the FSDL, then none of the delayed sums presented to individual SETs can, so no limiting action is required. If it does, then the input signals should be limited to bring the level down to the FSDL. The attack and release time constants and the amount of lookahead can be either under the control of the user or factory-preset according to application.

If used in conjunction with ONSQ stages, the MML can act either before or after the oversampler.

Lower latency can be achieved by deriving the control signal from the input signals before oversampling, then applying the limiting action to the oversampled signals; a lower order, lower group delay anti-imaging filter can be used for the

-55-

control signal, as it has limited bandwidth.

- Figure 31 illustrates a two-channel implementation of the MML although it can be extrapolated for any number of channels (input signals). The input signals (3101) come from the input circuitry or the linear compensators. The output signals (3111) go to the Distributors. Each delay unit (3102) comprises a buffer and stores a number of samples of its input signal and outputs the maximum absolute value contained in its buffer as (3103). The length of the buffer can be changed to track the range of delays implemented in the distributors by control signals which are not illustrated. The adder (3104) sums these maximum values from each channel. Its output is converted by the response shaper (3105) into a more smoothly varying gain control signal with specified attack and release rates. Before being sent to the Distributors as (3111), in stage (3110) the input signals are each attenuated in accordance with the gain control signal. Preferably, the signals are attenuated in proportion to the gain control signal.
- Delays (3109) may be incorporated into the channel signal paths in order to allow gain changes to anticipate peaks.

- If oversampling is to be incorporated, it can be placed within the MML, with upsampling stages (3106) followed by anti-image filters (3107-3108). High quality anti-image filters can have considerable group delay in the passband. Using a filter design with less group delay for 3108 can allow the delays 3109 to be reduced or eliminated.

- If the Distributors incorporate global ADFs (807), the MML is most usefully incorporated after them in the signal path, splitting the Distributors into separate global and per-SET stages.

- The seventh aspect of the invention therefore allows a limiting device which is simple in construction, which effectively prevents clipping and distortion and which maintains the required radiation shaping.

Eighth Aspect of the Invention

The eighth aspect of the invention relates to the method for detecting, and mitigating against the effects of, failed transducers in an array.

- 5 The method according to the eighth aspect requires that a test signal is routed to each output transducer of the array which is received (or not) by an input transducer located nearby, so as to determine whether a transducer has failed. The test signals may be output by each transducer in turn or simultaneously, provided that the test signals are distinguishable from one another. The test signals are generally
10 similar to those used in relation to the fourth aspect of the invention already described.

- The failure detection step may be carried out initially before setting up a system, for example during a "sound check" or, advantageously, it can be carried out all the time the system is in use, by ensuring that the test signals are inaudible or not
15 noticeable. This is achieved by providing that the test signals comprise pseudo-random noise signals of low amplitude. They can be sent by groups of transducers at a time, these groups changing so that eventually all the transducers send a test signal, or they can be sent by all of the transducers for substantially all of the time, being added to the signal which it is desired to output from the DPAA.

- 20 If a transducer failure is detected, it is often desirable to mute that transducer so as to avoid unpredictable outputs. It is then further desirable to reduce the amplitude of output of the transducers adjacent to the muted transducer so as to provide some mitigation against the effect of a failed transducer. This correction may extend to controlling the amplitude of a group of working transducers located
25 near to a muted transducer.

Ninth Aspect of the Invention

- The ninth aspect relates to a method for reproducing an audio signal received
30 at a reproducing device such as a DPAA which steers the audio output signals so that

-57-

they are transmitted mainly in one or a plurality of separate directions.

In general for a DPAA, the amount of delay observed at each transducer determines the direction in which the audio signal is directed. It is therefore necessary for an operator of such a system to program the device so as to direct the signal in a particular direction. If the desired direction changes, it is necessary to reprogram the device.

The ninth aspect of the invention seeks to alleviate the above problem by providing a method and apparatus which can direct an output audio signal automatically.

This is achieved by providing an information signal associated with the audio signal, the information signal comprising information as to how the sound field should be shaped at any particular time. Thus, every time the audio signal is played back, the associated information signal is decoded and is used to shape the sound field. This dispenses with the need for an operator to program where the audio signal must be directed and also allows the direction of audio signal steering to be changed as desired during reproduction of the audio signal.

The ninth aspect of the invention is a sound playback system capable of reproducing one or several audio channels, some or all of which of these channels have an associated stream of time-varying steering information, and a number of loudspeaker feeds. Each stream of steering information is used by a decoding system to control how the signal from the associated audio channel is distributed among the loudspeaker feeds. The number of loudspeaker feeds is typically considerably greater than the number of recorded audio channels and the number of audio channels used may change in the course of a programme.

The ninth aspect applies mainly to reproducing systems which can direct sound in one of a number of directions. This can be done in a plurality of ways:-

- Many independent loudspeakers may be scattered around the auditorium and directionality may be obtained by simply routing the audio signal to the loudspeaker nearest to the desired location, or through the several nearest loudspeakers, with the levels and time delays of each signal set to give more

-59-

Rather than using steering information which consists of gains, delays and filter coefficients for each loudspeaker feed, it can instead simply describe where the sound is to be focussed or to appear to have come from. During installation in an auditorium, the decoding system is programmed with, or determines by itself, the location of the loudspeaker(s) driven by each loudspeaker feed and the shape of the listening area. It uses this information to derive the gains, delays and filter coefficients necessary to make each channel come from the location described by the steering information. This approach to storing the steering information allows the same recording to be used with different speaker and array configurations and in differently sized spaces. It also significantly reduces the quantity of steering information to be stored or transmitted.

In audio-visual and cinema applications, the array would typically be located behind the screen (made of acoustically transparent material), and be a significant fraction of the size of the screen. The use of such a large array allows channels of sound to appear to come from any point behind the screen which corresponds to the locations of objects in the projected image, and to track the motion of those objects. Encoding the steering information using units of the screen height and width, and informing the decoding system of the location of the screen, will then allow the same steering information to be used in cinemas with different sized screens, while the apparent audio sources remain in the same place in the image. The system may be augmented with discrete (non-arrayed) loudspeakers or extra arrays. It may be particularly convenient to place an array on the ceiling.

Figure 32 shows a device for carrying out the invention. An audio signal multiplexed with an information signal is input to the terminal 3201 of the de-multiplexer 3207. The de-multiplexer 3207 outputs the audio signal and the information signal separately. The audio signal is routed to input terminal 3202 of decoding device 3208 and the information signal is routed to terminal 3203 of the decoding device 3208. The replicating device 3204 replicates the audio signal input at input terminal 3202 into a number of identical replicas (here, four replicas are used, but any number is possible). Thus, the replicating device 3204 outputs four

-60-

signals each identical to the signal presented at input terminal 3202. The information signal is routed from terminal 3203 to a controller 3209 which is able to control the amount of delay applied to each of the replicated signals at each of the delay elements 3210. Each of the delayed replicated audio signals are then sent to separate transducers 3206 via output terminal 3205 to provide a directional sound output.

The information comprising the information signal input at the terminal 3203 can be continuously changed with time so that the output audio signal can be directed around the auditorium in accordance with the information signal. This prevents the need for an operator to continuously monitor the audio signal output direction to provide the necessary adjustments.

It is clear that the information signal input to terminal 3203 can comprise values for the delays that should be applied to the signal input to each transducer 3206. However, the information stored in the information signal could instead comprise physical location information which is decoded in the decoder 3209 into an appropriate set of delays. This may be achieved using a look-up table which maps physical locations in the auditorium with a set of delays to achieve directionality to that location. Preferably, a mathematical algorithm, such as that provided in the description of the first aspect of the invention, is used which translates a physical location into a set of delay values.

The ninth aspect of the invention also comprises a decoder which can be used with conventional audio playback devices so that the steering information can be used to provide traditional stereo sound or surround sound. For headphone presentation, the steering information can be used to synthesize a binaural representation of the recording using head-related transfer functions to position apparent sound sources around the listener. Using this decoder, a recorded signal comprising the audio channels and associated steering information can be played back in a conventional manner if desired, say, because no phased array is available.

In this description, an "auditorium" has been referred to. However the described techniques can be applied in a large number of applications including home cinema and music playback as well as in large public spaces.

-61-

The above description refers to a system using a single audio input which is played back through all of the transducers in the array. However, the system may be extended to play back multiple audio inputs (again, using all of the transducers) by processing each input separately and thus calculating a set of delay coefficients for each input (based on the information signal associated with that input) and summing the delayed audio inputs obtained for each transducer. This is possible due to the linear nature of the system. This allows separate audio inputs to be directed in different ways using the same transducers. Thus many audio inputs can be controlled to have directivity in particular directions which change throughout a performance automatically.

Tenth Aspect of the Invention

The tenth aspect of the invention relates to a method of designing a sound field output by a DPAA device.

Where a user wishes to specify the radiation pattern, the use of ADFs allows a constrained optimisation procedure many degrees of freedom. A user would specify targets, typically areas of the venue in which coverage should be as even as possible, or should vary systematically with distance, other regions in which coverage should be minimised, possibly at particular frequencies, and further regions in which coverage does not matter. The regions can be specified by the use of microphones or another positioning system, by manual user input, or through the use of data sets from architectural or acoustic modelling systems. The targets can be ranked by priority. The optimisation procedure can be carried out either by within the DPAA itself, in which case it could be made adaptive in response to wind variations, as described above, or as a separate step using an external computer. In general, the optimisation comprises selecting appropriate coefficients for the ADFs to achieve the desired effect. This can be done, for example, by starting with filter coefficients equivalent to a single set of delays as described in the first aspect of the invention, and calculating the resulting radiation pattern through simulation. Further positive

-62-

and negative beams (with different, appropriate delays) can then be added iteratively to improve the radiation pattern, simply by adding their corresponding filter coefficients to the existing set.

5 Further Preferable Features

- There may be provided means to adjust the radiation pattern and focussing points of signals related to each input, in response to the value of the programme digital signals at those inputs - such an approach may be used to exaggerate stereo signals and surround-sound effects, by moving the focussing point of those signals momentarily outwards when there is a loud sound to be reproduced from that input only. Thus, the steering can be achieved in accordance with the actual input signal itself.

- In general, when the focus points are moved, it is necessary to change the delays applied to each replica which involves duplicating or skipping samples as appropriate. This is preferably done gradually so as to avoid any audible clicks which may occur if a large number of samples are skipped at once for example.

- Practical applications of this invention's technology include the following:
for home entertainment, the ability to project multiple real sources of sound to different positions in a listening room allows the reproduction of multi-channel surround sound without the clutter, complexity and wiring problems of multiple separated wired loudspeakers;

- for public address and concert sound systems, the ability to tailor the radiation pattern of the DPAA in three dimensions, and with multiple simultaneous beams allows:

much faster set-up as the physical orientation of the DPAA is not very critical and need not be repeatedly adjusted;

- smaller loudspeaker inventory as one type of speaker (a DPAA) can achieve a wide variety of radiation patterns which would typically each require dedicated speakers with appropriate horns;

-63-

better intelligibility, as it is possible to reduce the sound energy reaching reflecting surfaces, hence reducing dominant echoes, simply by the adjustment of filter and delay coefficients; and

- 5 better control of unwanted acoustic feedback as the DPAA radiation pattern can be designed to reduce the energy reaching live microphones connected to the DPAA input;

- 10 for crowd-control and military activities, the ability to generate a very intense sound field in a distant region, which field is easily and quickly repositionable, by focussing and steering of the DPAA beams (without having physically to move bulky loudspeakers and/or horns) and which is easily directed onto the target by means of tracking light sources, and provides a powerful acoustic weapon which is nonetheless non-invasive; if a large array is used, or a group of coordinated separate DPAA panels possibly widely spaced, then the sound field can be made much more intense in the focal region than near the DPAA SETs (even at the lower end of the Audio
- 15 Band if the overall array dimensions are sufficiently large).

CLAIMS

1. A method of directing sound waves derived from a signal using an array of output transducers, said method comprising:
 - 5 obtaining, in respect of each output transducer, a delayed replica of the signal, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer and a given direction so as to direct sound waves derived from said signal in said direction;
routing the delayed replicas to the respective output transducers.
- 10 2. A method according to claim 1, wherein said step of obtaining, in respect of each output transducer, a delayed replica of said signal to be directed comprises:
replicating said signal said predetermined number of times to obtain a replica signal in respect of each output transducer;
- 15 3. A method according to claim 2, further comprising:
delaying each replica of said signal to be directed by said respective delay selected in accordance with the position in the array of the respective output transducer and said direction.
- 20 4. A method according to claim 2, further comprising:
calculating, before said delaying step, the respective delays in respect of each replica by deriving respective delays for the replicas routed to each transducer, such that the same temporal parts of sound waves from each transducer together form a front travelling in said direction.
- 25 5. A method according to claim 2, further comprising:
calculating, before said delaying step, the respective delays in respect of each replica by:
determining the distance between each output transducer and a first position in space located in said direction;
- 30 6. A method according to claim 2, further comprising:
deriving respective delays such that the sound waves from each transducer

-65-

derived from said signal to be directed arrive at said position in space substantially simultaneously.

5. A method of creating a sound field having a simulated origin using an array of output transducers, said method comprising:
- obtaining, in respect of each output transducer, a delayed replica of an input signal, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer and the position of the simulated origin so as to create a sound field which substantially appears to originate at said simulated origin; and
 - routing the delayed replicas to the respective output transducers.
6. A method according to claim 5, wherein said step of obtaining, in respect of each output transducer, a delayed replica of said input signal comprises:
- replicating said input signal said predetermined number times to obtain a replica signal in respect of each output transducer;
 - delaying each replica of said input signal by said respective delay selected in accordance with the position in the array of the respective output transducer and the simulated origin.
7. A method according to claim 6, further comprising the steps of:
- calculating, before said delaying step, the respective delays in respect of each replica by deriving respective delays such that sound waves from each transducer are delayed by the time it would take for the signal to reach that transducer from the simulated origin.
8. An apparatus for directing sound waves, said apparatus comprising:
- an array of output transducers;
 - replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of the signal, the delayed replica being delayed by a

-66-

respective delay selected in accordance with the position in the array of the respective transducer and a given direction so as to direct sound waves derived from said signal to be directed substantially in said direction; and

means for routing the delayed replicas to the respective output transducers.

5

9. An apparatus according to claim 8, wherein said replication and delay means comprises:

means for replicating said signal said predetermined number of times to obtain a replica signal in respect of each output transducer; and

10 means for delaying each replica of said signal to be directed by said respective delay selected in accordance with the position in the array of the respective output transducer and said direction.

10. An apparatus according to claim 9, further comprising means for calculating, before said delaying step, the respective delays in respect of each replica by deriving respective delays for the replicas routed to each transducer such that the same temporal parts of sound waves from each transducer together form a front travelling in said direction.

20 11. An apparatus according to claim 9, further comprising means for calculating, before said delaying step, the respective delays in respect of each replica by:

determining the distance between each output transducer and a first position in space located in said direction;

25 deriving respective delays such that the sound waves from each transducer derived from said signal to be directed arrive at said position in space substantially simultaneously.

12. An apparatus to create a sound field having a simulated origin, said apparatus comprising:

30 an array of output transducers;

-67-

replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of an input signal, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer and the position of the simulated origin so as to create a sound

5 field which appears to originate at said simulated origin; and

means for routing the delayed replicas to the respective output transducers.

13. An apparatus according to claim 12, wherein said replication and delay means comprises:

10 means for replicating said input signal said predetermined number of times to obtain a replica signal in respect of each output transducer; and

means for delaying each replica of said input signal by said respective delay selected in accordance with the position in the array of the respective output transducer and the simulated origin.

15

14. An apparatus according to claim 13, further comprising means for calculating, before said delaying step, the respective delays in respect of each replica by deriving respective delays such that sound waves from each transducer are delayed by the time it would take for the signal to reach that transducer from the
20 simulated origin.

15. A method of cancelling sound waves derived from a signal at a null position using an array of output transducers, said method comprising:

obtaining, in respect of each output transducer, a delayed replica of the signal
25 to be cancelled, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer and the null position;

scaling and inverting each of said delayed replica signals; and

routing the scaled and inverted delayed replicas to the respective output
30 transducers so as to at least partially cancel a sound field at said null position.

16. A method according to claim 15, wherein said step of obtaining, in respect of each output transducer, a delayed replica of said signal to be cancelled comprises:
replicating said signal to be cancelled said predetermined number times to obtain a replica signal in respect of each output transducer;
5 delaying each replica of said signal to be cancelled by said respective delay selected in accordance with the position in the array of the respective output transducer and the null position.
17. A method according to claim 15 or claim 16, wherein said scaling and/or said
10 inverting is carried out on the signal to be cancelled before any delayed replicas are obtained therefrom.
18. A method according to any one of claims 15 to 17, wherein said signal to be cancelled is also supplied to the output transducers of said array.
- 15 19. A method according to claim 18, further comprising:
obtaining, in respect of each transducer, a delayed replica of the signal to be cancelled, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer;
20 summing, in respect of each output transducer, the respective inverted and scaled delayed replica with the respective delayed replica to obtain an output signal;
routing each output signal to its respective transducer.
20. A method according to claim 19, wherein said step of obtaining, in respect of
25 each output transducer, a delayed replica of said signal to be cancelled comprises:
replicating said signal to be cancelled said predetermined number times to obtain a replica signal in respect of each output transducer;
delaying each replica of said signal to be cancelled by a respective
predetermined delay selected in accordance with the position in the array of the
30 respective output transducer and the null position.

-69-

21. A method according to any one of claims 15 to 17, wherein said signal to be cancelled is supplied to one or more output transducers not part of said array of output transducers.
- 5 22. A method according to any one of claims 15 to 21, wherein said scaling is selected so that sound waves from said array of output transducers which are derived from said inverted and scaled signal to be cancelled have substantially the same magnitude as sound waves derived from said signal to be cancelled at said null position.
- 10 23. A method according to any one claims 15 to 22, wherein said signal to be cancelled is detected by an input transducer located at said null position.
24. A method according to claim 23, wherein said input transducer is moveable
- 15 and said null position is chosen to track the position of said input transducer so as to create a negative feedback loop in respect of the sound field at said null position.
25. An apparatus for cancelling sound waves at a null position, said apparatus comprising:
- 20 an array of output transducers;
replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of the signal to be cancelled, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer and the null position;
- 25 scaler means and inverter means for scaling and inverting each of said delayed replica signals;
means to route the scaled and inverted delayed replicas to the respective output transducers so as to at least partially cancel a sound field at said null position.
- 30 26. An apparatus according to claim 25, wherein said scaler means and/or said

-70-

inverter means are arranged before said replication and delay means.

27. An apparatus according to claim 25 or claim 26, further comprising means to route said signal to be cancelled to the output transducers of said array.

5

28. An apparatus according to claim 27, further comprising:

second replication and delay means arranged to obtain, in respect of each transducer, a delayed replica of the signal to be cancelled, the delayed replica being delayed by a respective delay selected in accordance with the position in the array of the respective transducer;

10

adder means for summing, in respect of each output transducer, the respective inverted and scaled delayed replica with the respective delayed replica to obtain an output signal;

means to route each output signal to its respective transducer.

15

29. An apparatus according to claim 25 or claim 26, further comprising one or more output transducers not part of said array of output transducers for outputting said signal to be cancelled.

20

30. An apparatus according to any one of claims 25 to 29, wherein said scaler is arranged to apply a scale factor so that sound waves from said array of output transducers which represent said inverted and scaled signal to be cancelled have substantially the same magnitude as sound waves representing said signal to be cancelled at said null position.

25

31. An apparatus according to any one of claims 25 to 30, further comprising an input transducer located at said null position so as to detect said signal to be cancelled.

30

32. An apparatus according to claim 31, wherein said input transducer is

-71-

moveable and said delaying means selects respective delays such that the null position tracks the position of said input transducer so as to create a negative feedback loop in respect of the sound field at said null position.

- 5 33. A method of causing plural input signals representing respective channels to appear to emanate from respective different positions in space, said method comprising:
- providing a sound reflective or resonant surface at each of said positions in space;
 - 10 providing an array of output transducers distal from said positions in space; and
 - directing, using said array of output transducers, sound waves of each channel towards the respective position in space to cause said sound waves to be re-transmitted by said reflective or resonant surface;
 - 15 said step of directing comprising:
 - obtaining, in respect of each transducer, a delayed replica of each input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space such that the sound waves of the channel are directed towards the position in space in respect of
 - 20 that channel;
 - summing, in respect of each transducer, the respective delayed replicas of each input signal to produce an output signal; and
 - routing the output signals to the respective transducers.
 - 25 34. A method according to claim 33, wherein said step of obtaining, in respect of each output transducer, a delayed replica of the input signal comprises:
 - replicating said input signal said predetermined number times to obtain a replica signal in respect of each output transducer;
 - delaying each replica of said input signal by said respective delay selected in
 - 30 accordance with the position in the array of the respective output transducer and said

respective position in space.

35. A method according to claim 33 or claim 34, further comprising:
calculating, before said delaying step, the respective delays in respect of each
5 input signal replica by:
determining the distance between each output transducer and the position in
space in respect of that input signal;
deriving respective delay values such that the sound waves from each
transducer for a single channel arrive at said position in space simultaneously.
10
36. A method according to any one claims 33 to 35, further comprising:
inverting one of said plural input signals;
obtaining, in respect of each output transducer, a delayed replica of said
inverted input signal delayed by a respective delay selected in accordance with the
15 position in the array of the respective transducer, so that sound waves derived from
said inverted input signal are directed at a position in space so as to cancel out at least
partially sound waves derived from that input signal at that position in space.
37. A method according to claim 36, wherein said step of obtaining, in respect of
20 each output transducer, a delayed replica of said inverted input signal comprises:
replicating said inverted input signal said predetermined number times to
obtain a replica signal in respect of each output transducer;
delaying each replica of said inverted input signal by a respective
predetermined delay selected in accordance with the position in the array of the
25 respective output transducer.
38. A method according to claim 36 or claim 37, wherein said inverted input
signal is scaled so that the sound waves derived from said inverted input signal
substantially cancel sound waves derived from that input signal at said position in
30 space.

-73-

39. A method according to claim 38, wherein said scaling is selected by determining, in respect of the input signal which has been inverted, the magnitude of sound waves at said position in space and selecting said scaling so that sound waves derived from said inverted input signal have substantially the same magnitude at that position.
40. A method according to any one of claims 33 to 39, wherein at least one of said surfaces is provided by a wall of a room or other permanent structure.
41. An apparatus for causing plural input signals representing respective channels to appear to emanate from respective different positions in space, said apparatus comprising:
- a sound reflective or resonant surface at each of said positions in space;
 - an array of output transducers distal from said positions in space; and
 - a controller for directing, using said array of output transducers, sound waves of each channel towards that channel's respective position in space such that said sound waves are re-transmitted by said reflective or resonant surface;
- said controller comprising:
- replication and delay means arranged to obtain, in respect of each transducer, a delayed replica of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said respective position in space such that the sound waves of the channel are directed towards the position in space in respect of that input signal;
 - adder means arranged to sum, in respect of each transducer, the respective delayed replicas of each input signal to produce an output signal; and
 - means to route the output signals to the respective transducers such that the channel sound waves are directed towards the position in space in respect of that input signal.

42. An apparatus according to claim 41, wherein said controller further comprises:
 calculation means for calculating the respective delays in respect of each input signal replica by::
 determining the distance between each output transducer and the position in space in respect of that input signal;
 deriving respective delay values such that the sound waves from each transducer for a single channel arrive at said position in space simultaneously.
43. An apparatus according to claim 41 or claim 42, wherein said controller further comprises:
 an inverter for inverting one of said plural input signals;
 second replication and delay means arranged to obtain, in respect of each output transducer, a delayed replica of said inverted input signal delayed by a respective delay selected in accordance with the position in the array of the respective transducer and a second position in space so that sound waves derived from said inverted input signal are directed at said second position in space so as to cancel out at least partially sound waves derived from that input signal at said second position in space.
44. An apparatus according to claim 43, wherein said controller further comprises a scaler for scaling said inverted input signal so that the sound waves derived from said inverted input signal substantially cancel sound waves derived from that input signal at said second position in space
45. An apparatus according to any one of claims 41 to 44, wherein said surfaces are reflective and have a roughness on the scale of the wavelength of sound frequency it is desired to diffusely reflect.
46. An apparatus according to any one of claims 41 to 45, wherein said surfaces

-75-

are optically-transparent.

47. An apparatus according to any one of claims 42 to 46, wherein at least one of said surfaces is a wall of a room or other permanent structure.

5

48. A method of detecting the position of an input transducer in the vicinity of an array of output transducers, said method comprising:

outputting respective distinguishable sonic test signals from at least three output transducers of said array;

10 receiving each of said test signals at said input transducer;

detecting the time between outputting each test signal and receiving it at the input transducer; and

using said detected times to calculate the apparent position of said input transducer by triangulation.

15

49. A method according to claim 48, wherein:

said respective distinguishable sonic test signals are output from at least four output transducers; and

the detected times are used to calculate a value for the average speed of
20 sound, as well as the apparent position of said input transducer.

50. A method according to claim 48 or claim 49, wherein said calculation comprises:

forming more simultaneous equations than there are variables;

25 solving these simultaneous equations to find values for the variables which give the overall smallest error.

51. A method according to any one claims 48 to 50, further comprising:

outputting an input signal using a group of output transducers other than the
30 transducers which output a sonic test signal.

-76-

52. A method according to any one claims 48 to 51, further comprising:
outputting an input signal from said at least three output transducers by
adding the input signal to the respective sonic test signal.
53. A method according to claim 51 or claim 52, wherein said input signal is a
signal detected by said input transducer.
54. A method according to claim 53, further comprising:
obtaining, in respect of each output transducer of said array, a delayed replica
of the input signal delayed by a respective delay selected in accordance with the
position in the array of the respective output transducer and the detected position of
said input transducer;
scaling and inverting said delayed replicas of said input signal;
routing said scaled inverted delayed replicas of the input signal to respective
output transducers so that sound waves derived from said input signal are
substantially cancelled at the position of said input transducer.
55. A method according to claim 54, wherein said step of obtaining, in respect of
each output transducer of the array, a delayed replica of the input signal comprises:
replicating said input signal said predetermined number times to obtain a
replica signal in respect of each output transducer;
delaying each replica of said input signal by said respective delay selected in
accordance with the position in the array of the respective output transducer and the
detected position of said input transducer.
56. A method according to claim 54 or claim 55, wherein the sound waves
derived from said test signals are not cancelled at the position of said input
transducer.
57. A method according to any one of claims 54 to 56, wherein said scaling and

-77-

inverting is carried out on said input signal before said delayed replicas are created.

58. A method according to any one of claims 51 to 53, further comprising:
obtaining, in respect of each output transducer of said array, a delayed replica
5 of the input signal delayed by a respective delay selected in accordance with the
position in the array of the respective output transducer and the detected position of
said input transducer so as to direct sound waves derived from said input signal
towards the detected position of said input transducer; and
routing the delayed replicas of the input signal to respective output
10 transducers.

59. A method according to claim 58, wherein said step of obtaining, in respect of
each output transducer of the array, a delayed replica of the input signal comprises:
replicating said input signal said predetermined number times to obtain a
15 replica signal in respect of each output transducer;
delaying each replica of said input signal by said respective delay selected in
accordance with the position in the array of the respective output transducer and the
detected position of said input transducer.

- 20 60. A method according to claim 58 or claim 59, wherein said respective delays
are selected such that sound waves are directed towards said input transducer even
under conditions of wind or other unpredictable perturbations.

61. A method according to any one of claims 48 to 60, further comprising:
25 calculating a wind vector from said detected apparent position of said input
transducer and the known position of said input transducer.

62. A method according to claim 61, wherein said calculated wind vector is used
to adjust the delays of input signal replicas to ensure desired operation despite the
30 wind.

-78-

63. A method according to any one of claims 48 to 62, wherein each output transducer outputs a test signal in turn.
64. A method according to any one of claims 48 to 62, wherein each output
5 transducer emits a distinguishable test signal simultaneously.
65. A method according to claim 63 or claim 64, wherein said test signals comprise a set of independent pseudo-random noise signals which are distinguishable using a correlation function.
- 10 66. A method according to any one of claims 63 to 65, wherein said test signals have a shaped frequency spectrum.
67. A method according to claim 66, wherein said frequency spectrum is shaped
15 so power is located at the less audible frequencies of the audio band.
68. A method according claim 66 or claim 67, wherein said frequency spectrum is shaped so that said test signal is masked by a signal routed to the output transducers.
- 20 69. A method according to any one of claims 48 to 68, wherein said input transducer is located in a hand-held remote control which is operable to control the operation of the output transducers remotely.
- 25 70. A method of detecting the position of an output transducer situated in the vicinity of an array of input transducers, said method comprising:
outputting a sonic test signal from said output transducer;
receiving said test signal at at least three input transducers in said array;
detecting the time between outputting said test signal and receiving it at each
30 input transducer; and

-79-

using said detected times to calculate the apparent position of said output transducer by triangulation.

71. A method according to claim 70, wherein:
5 said test signal is received at a fourth input transducer in the array; and
 the detected times are used to calculate a value for the average speed of
 sound, as well as the apparent position of said output transducer by triangulation.
72. A method according to claim 70 or claim 71, wherein said calculation
10 comprises:
 forming more simultaneous equations than there are variables;
 solving these simultaneous equations to find values for the variables which
 give the overall smallest error.
- 15 73. A method according to any one of claims 70 to 72, further comprising:
 receiving an input signal at each input transducer of the array;
 obtaining, in respect of each input transducer of said array, a delayed input
 signal delayed by a respective delay selected in accordance with the position in the
 array of the respective input transducer and the detected position of said output
20 transducer;
 summing each of said delayed input signals to obtain an output signal.
74. A method according to claim 73, further comprising:
 dividing the magnitude of said output signal by approximately the number of
25 input transducers in said array so as to scale said output signal and optimise nulling;
 obtaining, in respect of each input transducer of said array, an advanced
 scaled output signal advanced by a respective advance selected to be the same
 amount of time as the respective delay applied to the respective input signal;
 subtracting, in respect of each input transducer, the respective advanced
30 scaled output signal from the respective input signal to obtain a set of input signals

-80-

adjusted so as to give less weight to sound waves emanating from the position of said output transducer.

75. A method according to claim 73 or claim 74, wherein said test signals are
5 subtracted from said received input signals before said delayed input signals are obtained.

76. A method according to any one of claims 70 to 75, wherein each said test
10 signal comprises a pseudo-random noise signal.

77. An apparatus operable to detect the position of an input transducer situated in
the vicinity of an array of output transducers, said apparatus comprising:
an array of output transducers;
an input transducer;
15 a controller connected to said array of output transducers and said input
transducer, said controller being arranged to route respective distinguishable sonic
test signals to at least three of said output transducers and to detect the time between
outputting each test signal and receiving it at the input transducer so as to calculate
the apparent position of said input transducer by triangulation.

78. An apparatus according to claim 77, wherein:
said controller is arranged to route respective distinguishable sonic test
signals to at least four output transducers; and
the detected times are used to calculate a value for the average speed of
25 sound, as well as to calculate the apparent position of said input transducer by
triangulation.

79. An apparatus according to claim 77 or claim 78, wherein said controller is
further arranged to output an input signal from a group of output transducers other
30 than the transducers which output a sonic test signal.

-81-

80. An apparatus according to any one of claims 77 to 79, wherein said controller is further arranged to output an input signal from said at least three output transducers by adding it to the respective sonic test signal.
- 5 81. An apparatus according to claim 79 or claim 80, further comprising:
replication and delay means to obtain, in respect of each output transducer of said array, a delayed replica of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and the detected position of said input transducer;
- 10 scaler means and inverter means for scaling and inverting said delayed replicas of said input signal;
means to route said scaled inverted delayed replicas of the input signal to respective output transducers so that sound waves derived from said input signal are at least partially cancelled at the position of said input transducer.
- 15 82. An apparatus according to claim 81, wherein said input signal is derived from a signal detected at said input transducer, and said controller is further arranged to subtract the sonic test signal from the respective input signals so that the sound waves derived from said test signals are not cancelled at the position of said input
- 20 transducer.
83. An apparatus according to claim 81 or claim 82, wherein said scaler means and/or said inverter means is arranged before said replication and delay means so as to scale and invert said input signal before it is replicated and delayed.
- 25 84. An apparatus according to claim 79 or claim 81, further comprising:
second replication and delay means to obtain, in respect of each output transducer of said array, a delayed replica of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output
- 30 transducer and the detected position of said input transducer so as to direct sound

-82-

waves derived from said input signal towards the detected position of said input transducer;

means to route the delayed replicas of the input signal to respective output transducers.

5

85. An apparatus according to any one claims 77 to 84, wherein said input transducer is located in a hand-held remote control which is operable to control the operation of the output transducers remotely.

10 86. An apparatus according to any one of claims 77 to 85, wherein said input transducer is mobile within the vicinity of the array of output transducers and the controller operates to track the position of the input transducer as it moves.

87. An apparatus according to any one of claims 77 to 86, wherein said input
15 transducer is connected to said controller via an infrared link.

88. An apparatus according to any one of claims 77 to 87, further comprising:
means for calculating a wind vector from said detected apparent position of
said input transducer and the known position of said input transducer.

20

89. An apparatus according to claim 88, wherein said calculated wind vector is
used to adjust the delays of input signal replicas to ensure desired operation despite
the wind.

25 90. An apparatus according to any one of claims 77 to 89, further comprising
means for causing each output transducer to output a test signal in turn.

91. An apparatus according to any one of claims 77 to 89, further comprising
means for causing each output transducer to emit a distinguishable test signal

30 simultaneously.

-83-

92. An apparatus according to claim 90 or claim 91, wherein said test signals comprise a set of independent pseudo-random noise signals which are distinguishable using a correlation function.
- 5 93. An apparatus according to any one of claims 90 to 92, wherein said test signals have a shaped frequency spectrum.
94. An apparatus according to claim 93, wherein said frequency spectrum is shaped so power is located at the less audible frequencies of the audio band.
- 10 95. An apparatus according claim 93 or claim 94, wherein said frequency spectrum is shaped so that said test signal is masked by a signal routed to the output transducers.
- 15 96. An apparatus operable to detect the position of an output transducer situated in the vicinity of an array of input transducers, said apparatus comprising:
 - an array of input transducers;
 - an output transducer;
 - a controller connected to said array of input transducers and said output
- 20 transducer, said controller being arranged to route a sonic test signal to said output transducer and to detect the time between outputting said test signal and receiving it at at least three of said input transducers so as to calculate the apparent position of said input transducer by triangulation.
- 25 97. An apparatus according to claim 96, wherein:
 - said test signal is received at a fourth input transducer in the array; and
 - the detected times are used to calculate a value for the average speed of sound, as well as to calculate the apparent position of said output transducer by triangulation.

-84-

98. An apparatus according to claim 96 or claim 97, wherein each input transducer of said array of input transducers receive a respective input signal, the apparatus further comprising:

- replication and delay means to obtain, in respect of each input transducer of
5 said array, a delayed input signal delayed by a respective delay selected in accordance with the position in the array of the respective input transducer and the detected position of said output transducer;

an adder for summing each of said delayed input signals to obtain an output signal.

10

99. An apparatus according to claim 98, further comprising:

divider means for dividing the magnitude of said output signal by the number of input transducers in said array so as to scale said output signal;

- replication and advancing means to obtain, in respect of each input transducer
15 of said array, an advanced scaled output signal advanced by a respective advance selected to be the same amount of time as the respective delay applied to the respective input signal; and

subtractor means for subtracting, in respect of each input transducer, the respective advanced scaled output signal from the respective input signal to obtain a
20 set of input signals adjusted so as to give less weight to sound waves emanating from the position of said output transducer.

100. An apparatus according to claim 98 or claim 99, further comprising a second subtractor to subtract said test signals from said received input signals before said
25 delayed input signals are obtained.

101. A method according to any one of claims 33 to 40, wherein said respective positions in space are determined using the method of any one of claims 48 to 69.

- 30 102. A method according to claim 35 or an apparatus according to claim 42,

-85-

wherein a value for the speed of sound obtained by using the method of claim 49.

103. A method of transmitting sound waves using an array of output transducers, said method comprising:

- 5 frequency dividing an input signal into at least two frequency bands;
obtaining, in respect of each output transducer of said array of output transducers, a delayed replica of a first band of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer such that the sound field derived from the first band of
10 said input signal is shaped in a desired way;
obtaining, in respect of each output transducer, a replica of a second band of the input signal;
summing respective replicas of said first and second bands to create respective output signals in respect of each transducer; and
15 routing said output signals to respective transducers.

104. A method according to claim 103, wherein said step of obtaining, in respect of each output transducer of the array, a delayed replica of the first band of the input signal comprises:

- 20 replicating said first band of said input signal said predetermined number times to obtain a replica signal in respect of each output transducer;
delaying each replica of said first band of said input signal by a respective predetermined delay selected in accordance with the position in the array of the respective output transducer and said first selected direction.

25

105. A method according to claim 103 or claim 104, wherein said delays are obtained in accordance with a first selected direction such that sound waves derived from the first band of said input signal are directed in said first direction.

- 30 106. A method according to claim 103 or claim 104, wherein said delays are

-86-

obtained in accordance with a simulated origin such that the sound field appears to emanate from that simulated origin.

107. A method according to any one of claims 103 to 106, further comprising:
- 5 obtaining, in respect of each output transducer, a delayed replica of said second band of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and a second selected direction such that sound waves derived from said second band of said input signal are directed in said second direction different from said first direction.
- 10 108. A method according to claim 107, wherein said step of obtaining, in respect of each output transducer of the array, a delayed replica of the second band of the input signal comprises:
- replicating said second band of said input signal said predetermined number
- 15 times to obtain a replica signal in respect of each output transducer;
- delaying each replica of said second band of said input signal by a respective predetermined delay selected in accordance with the position in the array of the respective output transducer and said second selected direction.
- 20 109. A method according to claim 103, wherein no, or a constant, delay is applied to each of the replicas of said second band of the input signal.
110. A method of transmitting sound waves using an array of output transducers, said method comprising:
- 25 frequency dividing an input signal into at least two frequency bands;
- obtaining, in respect of each output transducer of said array of output transducers, a delayed replica of a first band of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and a first selected direction;
- 30 scaling and inverting said delayed replicas of said first band of said input

signal;

obtaining, in respect of each output transducer, a replica of a second band of the input signal;

summing respective replicas of said first and second bands to create

5 respective output signals in respect of each transducer; and

routing said output signals to respective transducers such that sound waves derived from the first band of said input signal are at least partially cancelled in a particular direction.

10 111. A method according to claim 110, wherein said step of obtaining, in respect of each output transducer of the array, a delayed replica of the first band of the input signal comprises:

replicating said first band of said input signal said predetermined number times to obtain a replica signal in respect of each output transducer;

15 delaying each replica of said first band of said input signal by a respective predetermined delay selected in accordance with the position in the array of the respective output transducer and the first selected direction.

112. A method according to claim 110 or claim 111, wherein said scaling and/or 20 said inverting is carried out on the signal to be cancelled before any delayed replicas are obtained therefrom.

113. A method according to any one of claims 110 to 112, wherein said frequency splitting step and said obtaining step are carried out at the same time by a filter 25 having band-pass characteristics so as to only pass said first band with a delay.

114. A method according to any one of claims 103 to 113, wherein said first band represents a higher frequency band of said input signal than said second band.

30 115. An apparatus to transmit sound waves comprising:

-88-

an array of output transducers;

frequency divider means for dividing an input signal into at least two frequency bands;

replication and delay means to obtain, in respect of each output transducer of said array of output transducers, a delayed replica of a first band of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer;

said replication and delay means being arranged further to obtain, in respect of each output transducer, a replica of a second band of the input signal;

adder means for summing respective replicas of said first and second bands to create respective output signals in respect of each transducer; and

means to route said output signals to respective transducers.

116. An apparatus according to claim 115, wherein said delayed replicas are obtained in accordance with a first selected direction such that sound waves derived from the first band of said input signal are directed in said first direction.

117. An apparatus according to claim 115, wherein said delayed replicas are obtained in accordance with a simulated origin such that the sound field appears to emanate from that simulated origin.

118. An apparatus according to any one of claims 115 to 117, wherein said replication and delay means is arranged to obtain, in respect of each output transducer, a delayed replica of said second band of the input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and a second selected direction such that sound waves derived from said second band of said input signal are directed in said second direction different to said first direction.

119. An apparatus according to claim 115, wherein said replicator and delaying

-89-

means is arranged to apply no, or a constant, delay to each of the replicas of said second band of the input signal.

120. An apparatus to transmit sound waves comprising:
 - 5 an array of output transducers;
frequency divider means for frequency dividing an input signal into at least two frequency bands;
replication and delay means to obtain, in respect of each output transducer of said array of output transducers, a delayed replica of a first band of the input signal
10 delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and a first selected direction;
scaler means and inverter means for scaling and inverting said delayed replicas of said first band of said input signal;
said replicator and delaying means being arranged further to obtain, in respect
15 of each output transducer, a replica of a second band of the input signal;
an adder for summing respective replicas of said first and second bands to create respective output signals in respect of each transducer; and
means to route said output signals to respective transducers such that sound waves derived from the first band of said input signal are at least partially cancelled
20 in a particular direction.
 121. An apparatus according to claim 120, wherein said scaler means and/or said inverter means are arranged before said replication and delay means.
 - 25 122. An apparatus according to claim 120 or claim 121, wherein said frequency divider means and said delay means comprises a filter which passes only said first band with a delay.
 123. An apparatus according to any one of claims 115 to 122, wherein said first
30 band represents a higher frequency band of said input signal than said second band.

-90-

124. A method of indicating the position of focus of sound, said method comprising:

shining a first beam of light in a first direction and a second beam of light in a second direction from separated sources so that the beams intersect at a first position

5 in space; and

focussing first sound waves derived from a first input signal at said first position in space.

125. A method according to claim 124, wherein said first beam of light is a
10 different colour to said second beam of light.

126. A method according to claim 124 or claim 125, wherein said focussing comprises:

obtaining, in respect of each output transducer of an array of output
15 transducers, a delayed replica of the first input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said first and second directions; and
routing said delayed replicas of the first input signal to respective transducers.

20 127. A method according to claim 126, wherein said step of obtaining, in respect of each output transducer of the array, a delayed replica of the first input signal comprises:

replicating said first input signal said predetermined number times to obtain a replica signal in respect of each output transducer;

25 delaying each replica of said first input signal by a respective predetermined delay selected in accordance with the position in the array of the respective output transducer and said first and second directions.

128. A method according to claim 126 or claim 127, wherein the delay of the first
30 input signal routed to each transducer is varied such that said first sound waves are

-91-

output from each transducer in the array with a delay causing said first sound waves to arrive at said first position in space simultaneously.

129. A method according to any one of claims 126 to 128, further comprising:
5 shining a third beam of light in a third direction and a fourth beam of light in a fourth direction from separated sources so that the beams intersect at a second position in space; and
 focussing second sound waves derived from a second input signal at said second position in space;
10 said focussing comprising:
 obtaining, in respect of each output transducer of said array of output transducers, a delayed replica of the second input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said third and fourth directions;
15 said routing step being replaced by:
 summing, in respect of each output transducer, a respective delayed replica of the first input signal with a respective delayed replica of the second input signal to create an output signal; and
 routing said output signals to respective transducers.
20 130. A method according to claim 129, wherein said step of obtaining, in respect of each output transducer of the array, a delayed replica of the second input signal comprises:
 replicating said second input signal said predetermined number times to
25 obtain a replica signal in respect of each output transducer;
 delaying each replica of said second input signal by a respective predetermined delay selected in accordance with the position in the array of the respective output transducer and said third and fourth directions.
- 30 131. An apparatus for allowing a user to select where sound waves are focussed,

-92-

said apparatus comprising:

at least one output transducer arranged to receive a first input signal and output sound waves derived from said first input signal;

a first light source for shining a first light beam in a selectable first direction;

5 a second light source for shining a second light beam in a selectable second direction; and

a controller connected to said output transducer and said first and second light sources, said controller controlling said first and second directions in response to user selections and controlling said at least one output transducer to cause sound waves
10 derived from said first input signal to be focussed at a first position in space where said light beams intersect.

132. An apparatus according to claim 131, wherein said first light source emits light of a different colour to said second light source.

15 133. An apparatus according to claim 131 or claim 132, wherein said at least one output transducer comprises an array of output transducers and said controller further comprises:

replication and delay means to obtain, in respect of each output transducer of
20 said array of output transducers, a delayed replica of the first input signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer and said first and second directions; and

means to route said delayed replicas of the first input signal to respective transducers.

25 134. An apparatus according to claim 133, wherein said delay means varies the delay of the first input signal routed to each transducer such that said first sound waves are output from each transducer in the array with a delay causing said first sound waves to arrive at said first position in space simultaneously.

30

-93-

135. An apparatus according to claim 133 or claim 134, further comprising:
a third light source for shining a third light beam in a selectable third
direction;
a fourth light source for shining a fourth light beam in a selectable fourth
5 direction;
focussing second sound waves derived from a second input signal at said
second position in space;
said replication and delay means being further arranged to obtain, in respect
of each output transducer of said array of output transducers, a delayed replica of a
10 second input signal delayed by a respective delay selected in accordance with the
position in the array of the respective output transducer and said third and fourth
directions:
said means to route being replaced by:
an adder for summing, in respect of each output transducer, a respective
15 delayed replica of the first input signal with a respective delayed replica of the
second input signal to create an output signal; and
means to route said output signals to respective transducers.
136. A method according to any one of claims 124 to 130 or an apparatus
20 according to any one of claims 131 to 135, wherein said light beams are
independently controllable by a user such that a user can focus sound waves derived
from said first signal at said first position in space by independently controlling
where said first and second light beams intersect.
137. A method according to any one of claims 126 to 130 or an apparatus
25 according to claim 133 or claim 134, wherein a value for the speed of sound obtained
using the method of claim 49 is used to calculate the respective delays.
138. A method of limiting at least one output signal generated from a first and
30 second signal, said method comprising:

-94-

windowing said first signal to create a first windowed portion comprising consecutive samples of said first signal;

determining the magnitude of the largest sample in said windowed portion of said first signal;

- 5 windowing said second signal to create a second windowed portion comprising consecutive samples of said second signal;

determining the magnitude of the largest sample in said windowed portion of said second signal;

- summing together said largest samples from said first and second windowed
- 10 portions to obtain a first control signal;

attenuating the magnitude of said first and second signals in accordance with the magnitude of said control signal; and

generating said at least one output signal from said first and second signals.

- 15 139. A method according to claim 138, wherein a plurality of output signals for a predetermined number of output transducers in an array are generated; said method further comprising:

obtaining, in respect of each output transducer of the array, a delayed replica of the first signal delayed by a respective delay selected in accordance with the

- 20 position in the array of the respective output transducer;

obtaining, in respect of each output transducer of the array, a delayed replica of the second signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer;

- summing each delayed replica of said first signal with a respective delayed
- 25 replica of said second signal to obtain an output signal in respect of each transducer;
- and

routing each output signal to a separate sonic output transducer in an array of transducers, said predetermined delays being selected to direct sound waves output from the array of transducers.

-95-

140. A method according to claim 139, wherein said step of obtaining, in respect of each output transducer of the array, a delayed replica of the first signal comprises: replicating said first signal said predetermined number times to obtain a replica signal in respect of each output transducer;

5 delaying each replica of said first signal by a respective predetermined delay
selected in accordance with the position in the array of the respective output
transducer; and wherein said step of obtaining, in respect of each output transducer of
the array, a delayed replica of the second signal comprises:

replicating said second signal said predetermined number of times to obtain a
10 replica signal in respect of each output transducer;

delaying each replica of said second signal by a respective predetermined delay selected in accordance with the position in the array of the respective output transducer.

15 141. A method according to claim 139 or claim 140, wherein said first windowing step creates a first windowed portion of at least $(dmax_1) \cdot F_s$ samples where $dmax_1$ is the maximum predetermined delay in seconds which is applied to any replica of said first signal and F_s is the sampling frequency in Hertz of said first signal and said second windowing step creates a second windowed portion of at least $(dmax_2) \cdot F_s$ samples where $dmax_2$ is the maximum predetermined delay in seconds which is applied to any replica of said second signal and F_s is the sampling frequency in Hertz of said second signal.

142. A method according to any one of claims 138 to 141, further comprising
25 before said step of attenuating the magnitude of said first and second signals;
oversampling and anti-image filtering said first signal;
oversampling and anti-image filtering said second signal; and
oversampling and anti-image filtering said control signal;
wherein said anti-image filtering steps introduce a group delay to the
30 respective filtered signals and wherein said control signal is delayed by a smaller

-96-

amount of time than said first and second signals.

143. A method according to any one of claims 138 to 142, further comprising the step of:

- 5 delaying said first and second signals relative to said control signal prior to said attenuating step.

144. A method according to any one of claims 138 to 143, further comprising the step of:

- 10 smoothing said control signal.

145. A method according to any one of claims 138 to 144, wherein said first and second signals are attenuated by an amount proportional to the magnitude of said control signal.

15

146. A signal limiting device comprising:

- a first buffer for storing a series of consecutive samples of a first signal;
- a second buffer for storing a series of consecutive samples of a second signal;
- analysing means for determining the maximum value stored in each buffer at

- 20 each sampling clock period;

- an adder for adding said maximum values so as to obtain a control signal;
- an attenuator for attenuating each of said first and second signals by an amount in accordance with said control signal; and
- means to generate an output signal from said first and second signals.

25

147. A signal limiting device according to claim 146, further comprising:

- means to generate a plurality of output signals for a predetermined number of output transducers in an array;

- a replicator to replicate said first signal said predetermined number times to

- 30 obtain a replica signal in respect of each output transducer;

-97-

a replicator to replicate said second signal said predetermined number of times to obtain a replica signal in respect of each output transducer;

delaying means to delay each replica of said first signal by a respective predetermined delay selected in accordance with the position in the array of the respective output transducer;

delaying means to delay each replica of said second signal by a respective predetermined delay selected in accordance with the position in the array of the respective output transducer;

an adder to sum each delayed replica of said first signal with a respective delayed replica of said second signal to obtain an output signal in respect of each transducer; and

an array of sonic output transducers each arranged to receive a respective signal from said adder, said predetermined delays being selected to direct sound waves output from the array of transducers.

148. A signal limiting device according to claim 147, wherein said first buffer stores at least $(dmax_1) * F_s$ samples where $dmax_1$ is the maximum predetermined delay in seconds which is applied by said first delaying means to any replica of said first signal and F_s is the sampling frequency in Hertz of said first signal and said second buffer stores at least $(dmax_2) * F_s$ samples where $dmax_2$ is the maximum predetermined delay in seconds which is applied by said second delaying means to any replica of said second signal and F_s is the sampling frequency in Hertz of said second signal.

149. A signal limiting device according to any one of claims 146 to 148, further comprising:

oversampling means to oversample said first signal, said second signal and said control signal; and

anti-image filtering means to anti-image filter said oversampled first signal, said oversampled second signal and said oversampled control signal;

-98-

wherein said anti-image filtering means delays said first signal and said second signal by an amount greater than the amount it delays said control signal.

150. A signal limiting device according to any one of claims 146 to 149, further comprising:

means to delay said first signal arranged before the attenuator;
means to delay said second signal arranged before the attenuator.

151. A signal limiting device according to any one of claims 146 or 150, further comprising:

a signal shaper for shaping said control signal so as to be smoothly varying.

152. A signal limiting device according to any one of claims 146 to 151, wherein said attenuator attenuates said first and second signals by an amount proportional to the magnitude of said control signal.

153. A method of detecting failed transducers in an array of output transducers, said method comprising:

routing a test signal to each output transducer of the array; and
analysing a signal obtained at an input transducer in the vicinity of said array of output transducers to determine whether or not each output transducer has failed.

154. A method according to claim 153, wherein each output transducer emits a test signal in turn.

155. A method according to claim 153, wherein each output transducer emits a distinguishable test signal simultaneously.

156. A method according to claim 154 or 155, wherein said test signals comprise a set of independent pseudo-random noise signals which are distinguishable using a

-99-

correlation function.

157. A method according to any one of claims 153 to 156, further comprising muting any output transducers which have failed.

5

158. A method according to any one of claims 153 to 157, further comprising:
obtaining, in respect of each output transducer, a delayed replica of an input signal delayed by a respective delay selected in accordance with the position in the array of the respective transducer so as to direct sound waves derived from said input signal in a selected direction;
10 routing the delayed replicas of the input signal to respective transducers.

159. A method according to claim 158, wherein said step of obtaining, in respect of each output transducer of the array, a delayed replica of the input signal
15 comprises:

replicating said input signal said predetermined number times to obtain a replica signal in respect of each output transducer;
delaying each replica of said input signal by a respective predetermined delay selected in accordance with the position in the array of the respective output
20 transducer;

160. A method according to claim 159, further comprising:
summing, in respect of each output transducer, each delayed replica with a respective test signal.

25

161. A method according to any one of claims 158 to 160, further comprising:
applying a correction to the input signal replicas to account for the fact that one or more of said output transducers is muted so as to minimise the effect of any failed transducers.

30

-100-

162. A method according to claim 161, wherein said correction comprises controlling the amplitude of the delayed replicas routed to output transducers adjacent to a failed output transducer.
- 5 163. A method according to 162, wherein the amplitude of the delayed replicas routed to the output transducers is controlled such that the amplitude of delayed replicas decreases as you move closer to the failed output transducer.
164. A method according to any one of claims 153 to 163, wherein said test
10 signals have a shaped frequency spectrum.
165. A method according to claim 164, wherein said frequency spectrum is shaped so power is located at the less audible frequencies of the audio band.
- 15 166. A method according claim 164 or claim 165 , wherein said frequency spectrum is shaped so that said test signal is masked by a signal routed to the output transducers.
167. A method of reproducing an audio signal, said method comprising:
20 decoding an information signal associated with said audio signal:
processing said audio signal according to the information signal decoded in said decoding steps:
reproducing said processed audio signal.
- 25 168. A method according to claim 167, wherein said decoded information signal is a sound field shaping signal representing how the sound field should be shaped.
169. A method according to claim 168, wherein said decoded information signal is a sound beam steering signal representing where the audio signal should be directed.

-101-

170. A method according to claim 168, wherein said decoded information signal is a signal representing an origin from where the audio signal should appear to emanate.

171. A method according to any one of claims 167 to 170, wherein said processing
5 comprises obtaining, in respect of each output transducer of an array of output transducers, a delayed replica of the audio signal delayed by a respective delay selected in accordance with the position in the array of the respective output transducer.

10 172. A method according to any one of claims 167 to 169, wherein said step of reproducing said processed audio signal comprises routing each of the delayed replica signals to a respective output transducer of an array of output transducers so that directed sound is achieved in accordance with said information signal.

15 173. A method according to any one of claims 167 to 169, wherein said step of reproducing said processed audio signal comprises feeding said audio signal to a transducer and pointing that transducer at a particular location so that directed sound is achieved in accordance with said information signal.

20 174. A method according to claim 171 or claim 172, wherein each of said certain delay amounts are obtained from said information signals.

175. A method according to claim 171 or claim 172, wherein each of said certain
25 delays amounts are calculated using an algorithm and said information signal comprises a 3D or 2D co-ordinate.

176. A method according to claim 171 or claim 172, wherein each of said certain delays amounts are calculated using a look-up table and said information signal comprises an address in said look-up table.

-102-

177. A method according to claim 176, wherein said look-up table comprises a database relating a certain physical position with a set of delay values, said information signal comprises information indicating a certain physical position and said processing step comprises delaying said n replica audio signals by amounts
- 5 determined from the entry in the look-up table associated with the certain physical position indicated in the information signal.
178. A method according to claim 176 or claim 177, further comprising the step of calculating the look-up table by creating an association between certain physical
- 10 positions and a set of n delay amounts for each physical position, said step of calculating the look-up table being performed before said step of decoding an information signal.
179. A method according to any one of claims 167 to 178, wherein said
- 15 information signal is multiplexed with said audio signal.
180. A method according to claim 179, wherein said information signal and said audio signal are both digital signals and are time division multiplexed.
- 20 181. A method comprising:
- deciding on how a sound field comprising an audio signal should be shaped during reproduction; and
- coding said information signal according to the result of said decision.
- 25 182. A method according to claim 181, wherein said coded information signal is a sound field shaping signal representing how the sound field should be shaped.
183. A method according to claim 182, wherein said coded information signal is a sound beam steering signal representing where the audio signal should be directed.

-103-

184. A method according to claim 182, wherein said coded information signal is a signal representing an origin from where the audio signal should appear to emanate
185. A method according to any one of claims 181 to 184, further comprising:
5 associating said information signal with said audio signal.
186. A method according to any one of claims 181 to 185, wherein said coded information signal represents a focus position or simulated origin position and the step of coding said information signal comprises mapping the respective position to a
10 set of n delay coefficients and coding the n delay coefficients in said information signal.
187. A method according to any one of claims 181 to 185 wherein said coded information signal represents a focus position or simulated origin position and the
15 step of coding said information signal comprises associating a location code with the respective position and coding this location code into the information signal.
188. A method according to any one of claims 176, 186 or 187, wherein said respective position is determined relative to the output transducer(s) to be used
20 during reproduction of the audio signal.
189. A method according to any one of claims 176, 186 or 187, wherein said physical location is determined relative to a screen in a room in which the output transducer(s) used during reproduction of the signal are located
- 25 190. A device for reproducing an audio signal comprising:
an input terminal for inputting an audio signal;
an input terminal for inputting an information signal;
means of decoding the information signal;
30 a replicator and delaying means arranged to obtain, in respect of each output

-105-

identifying an amount by which attempted fulfilment of the second priority may detriment the fulfilment of the first priority; and

selecting, in respect of each output transducer of said array of output transducers, coefficients used to filter an input signal routed to the respective output transducer such that a directional sound field will be obtained, the sound field being such that the first priority is fulfilled within practical constraints and practical fulfilment of the second priority detracts from fulfilment of the first priority only by the amount identified.

- 10 195. A method of creating a sound field, said method comprising:
obtaining, in respect of each output transducer, a delayed replica of the input signal delayed by a respective delay selected according to the method of claim 194;
routing the delayed replicas of the input signal to respective output transducers.

15

196. A method according to claim 195, wherein said obtaining step comprises:
replicating said input signal a predetermined number of times to obtain a replica of the input signal in respect of each output transducer; and
delaying each replica of the input signal by said respective delay.

20

197. A method according to any one claims 194 to 196, in which said areas are identified by placing an input transducer in that area and using the method of any one of claims 48 to 69 to detect the position of the input transducer.

- 25 198. A method according to any one of claims 194 to 197, wherein said selected delays are chosen by selecting filter coefficients such that a delay which is generally different for each frequency component of the input signal is created.

199. A method or apparatus according to any one of claims 1 to 69, 77 to 95, 101
30 to 123, 126 to 130, 133 to 135, 139 to 141, 147, 148, 153 to 166, 171, 172, 174 to

30 206. A method or apparatus according to any one of claims 1 to 69, 77 to 95, 101

to 123, 126 to 130, 133 to 135, 139 to 141, 147, 148, 153 to 166, 171, 172, 174 to 178 or 194 to 205, wherein the signals are converted to PWM signals prior to being routed to respective output transducers of the array.

207. A method or apparatus according to claim 203, wherein said control is such
as to reduce the amplitude of output signals fed to transducers around the periphery
of the array.

208. A method or apparatus according to claim 208, wherein said control is such
10 as to reduce the amplitude of output signals fed to transducers in accordance with a
predetermined function such as a Gaussian curve or a raised cosine curve.

209. A method or apparatus according to any one of claims 1 to 123, 126 to 130,
133 to 135, 139 to 141, 147, 148, 153 to 166, 171, 172, 174 to 178 or 194 to 208,
15 wherein each of said transducers comprise a group of individual transducers.

210. A method or apparatus according to any one of claims 1 to 123, 126 to 130, 133 to 135, 139 to 141, 147, 148, 153 to 166, 171, 172, 174 to 178 or 194 to 209, wherein linear or non-linear compensators are provided before each output transducer
20 to adjust a signal routed thereto to account for imperfections in the output transducer.

211. A method or apparatus according to claim 210, wherein said compensator is a linear compensator provided to compensate an input signal before it is replicated.

25 212. A method or apparatus according to claim 209 or 210, wherein said .
compensators are adaptable in accordance with the sound field shape such that high
frequency components are boosted in accordance with the angle at which they are to
be directed.

30 213. A method or apparatus according to any one of claims 48 to 69, wherein said

-108-

array of output transducers creates a sound field on both of its two sides and said microphone position is established in part by analysing the polarity of the signals received at the input transducer.

- 5 214. A method or apparatus according to any one of claims 1 to 123, 126 to 130, 133 to 135, 139 to 141, 147, 148, 153 to 166, 171, 172, 174 to 178 or 194 to 213, wherein means are provided to gradually control changes in the sound field.

215. A method or apparatus according to claim 214, wherein said means operate
10 such that a signal delay is increased gradually by duplicating samples or decreased gradually by skipping samples.

216. A method or apparatus according to any one of claims 1 to 123, 126 to 130, 133 to 135, 139 to 141, 147, 148, 153 to 166, 171, 172, 174 to 178 or 194 to 215,
15 wherein the sound field directivity is changed on the basis of the signal input to the system and output by the array of output transducers.

- 217 A method or apparatus according to any one of claims 1 to 123, 126 to 130, 133 to 135, 139 to 141, 147, 148, 153 to 166, 171, 172, 174 to 178 or 194 to 216
20 wherein multiple arrays of output transducers are provided which are controlled by a shared controller.

218. A method for obtaining the signal to be cancelled of any one of claims 15 to 32, comprising obtaining the impulse response of the output transducer or the whole
25 array and using this impulse response to filter an input signal to produce the signal to be cancelled.

219. A method according to claim 218, in which the impulse response is determined using a test signal.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number
WO 01/23104 A2

(51) International Patent Classification⁷: B06B

(21) International Application Number: PCT/GB00/03742

(22) International Filing Date:
29 September 2000 (29.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9922919.7 29 September 1999 (29.09.1999) GB
0011973.5 19 May 2000 (19.05.2000) GB
0022479.0 13 September 2000 (13.09.2000) GB

(71) Applicant (for all designated States except US): I... IPR
LIMITED [GB/GB]; St John's Innovation Centre, Cam-
bridge CB4 0WS (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HOOLEY, Anthony
[GB/GB], I... Limited, St John's Innovation Centre, Cow-
ley Road, Cambridge CB4 0WS (GB). TROUGHTON,

Paul, Thomas [GB/GB]; I... Limited, St John's In-
novation Centre, Cowley Road, Cambridge CB4 0WS
(GB). GOUDIE, Angus, Gavin [GB/GB], I... Limited,
St John's Innovation Centre, Cowley Road, Cambridge
CB4 0WS (GB). BIENEK, Irving, Alexander [GB/GB];
I... Limited, St John's Innovation Centre, Cowley Road,
Cambridge CB4 0WS (GB). WINDLE, Paul, Raymond
[GB/GB], I... Limited, St John's Innovation Centre,
Cowley Road, Cambridge CB4 0WS (GB)


(74) Agents: MERRYWEATHER, Colin, Henry et al; J.A.
Kemp & Co., 14 South Square, Gray's Inn, London WC1R
5LX (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: METHOD AND APPARATUS TO DIRECT SOUND

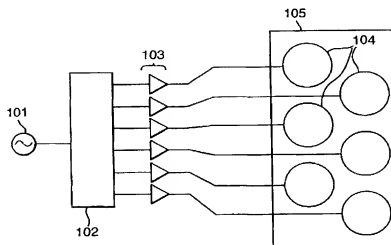

(57) Abstract: The invention relates to sonic steerable antennae and their use to achieve a variety of effects. The invention comprises a method and apparatus for taking an input signal, replicating it a number of times and modifying each of the replicas before routing them to respective output transducers such that a desired sound field is created. This sound field may comprise a directed beam, focus beam or a simulated organ. Further, "anti-sound" may be directed so as to create nulls (quiet spots) in an already existing sound field. The input signal replicas may also be modified in way which changes their amplitude or they may be filtered to provide the desired delaying. Reflective or resonant surfaces may be used to achieve a surround sound effect, a microphone may be located in front of an array of loudspeakers, beams of light may be used to identify the present focal position, a limiting device may be used to ensure that clipping or distortion is reduced when more than one input signal is output by the same device and the concept of beam directivity may be used to achieve input nulls or beams in a microphone made up of an array of input transducers. Further, sound field shaping information may be associated with an audio signal to be broadcast.

WO 01/23104 A2



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette

Published:

— Without international search report and to be republished upon receipt of that report

1/22

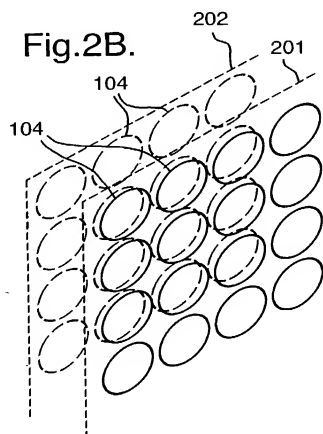

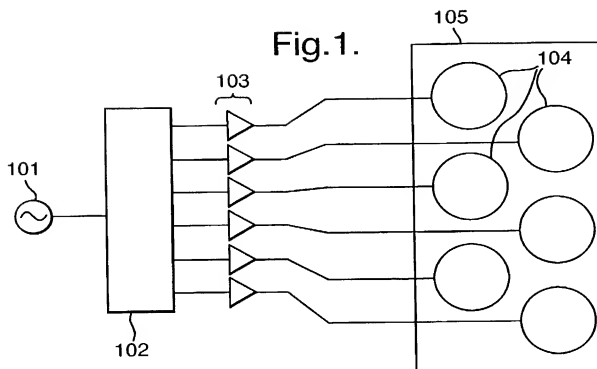


Fig.3A.




Fig.3B




Fig.4A.







Fig.4B.

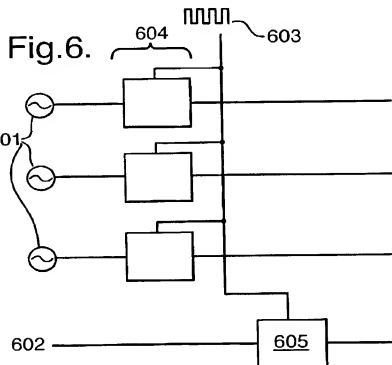

3/22

Fig.5.

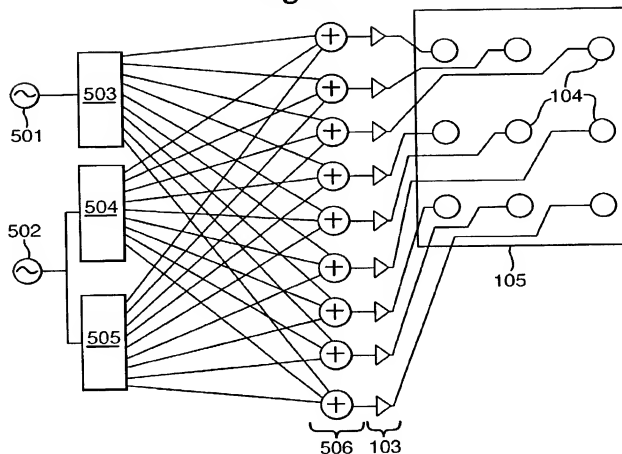

4/22

Fig.7.


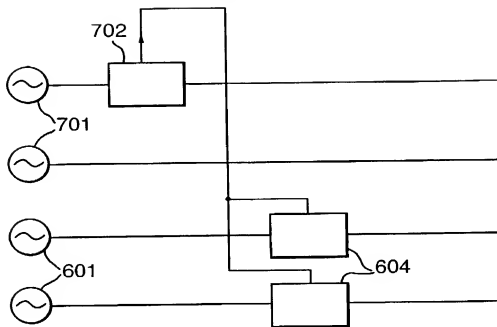


Fig.8.

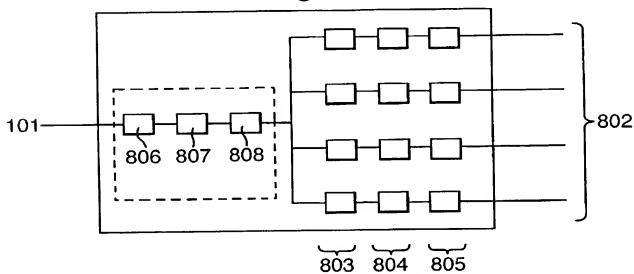

5/22

Fig.9.

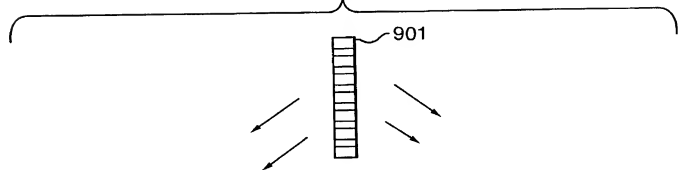


Fig.10.


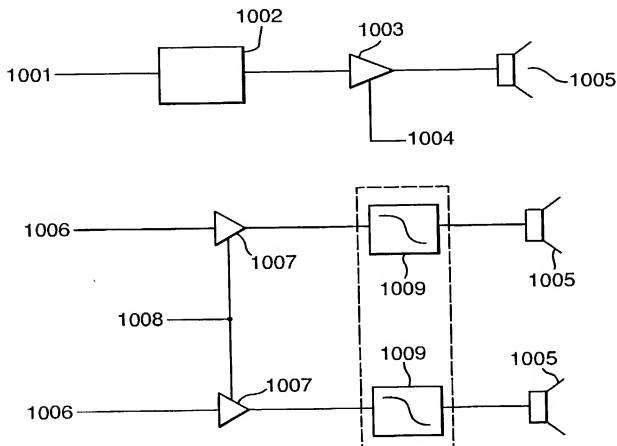


Fig.11.

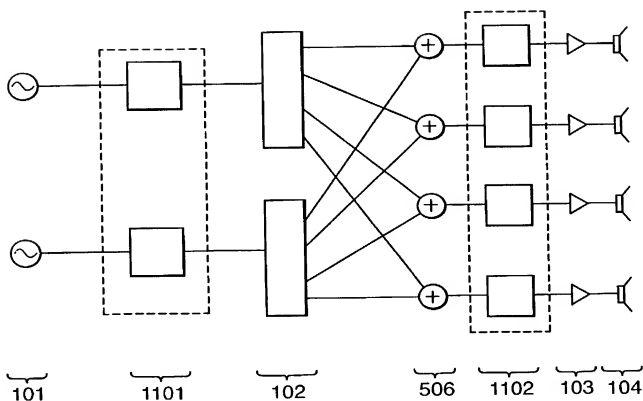

7/22

Fig.12.



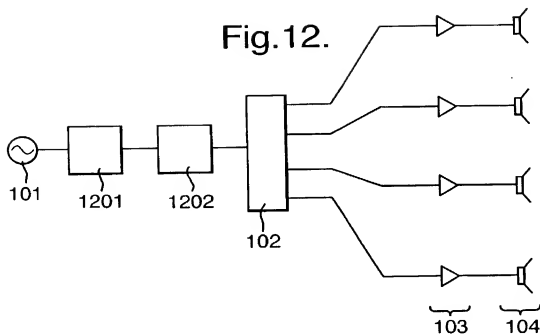


Fig.13.

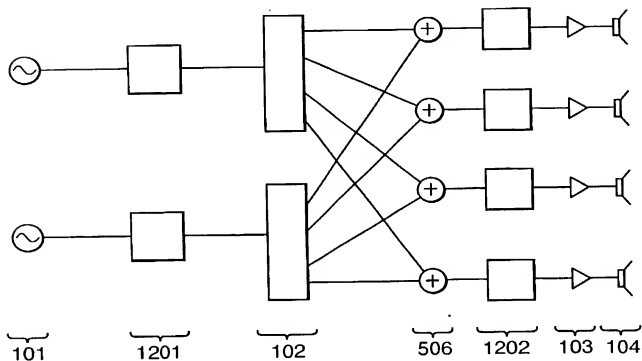

8/22

Fig.14.

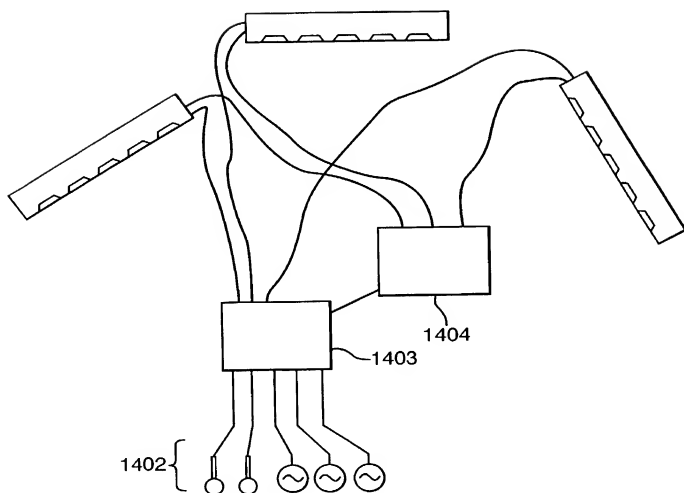

9/22

Fig.15.

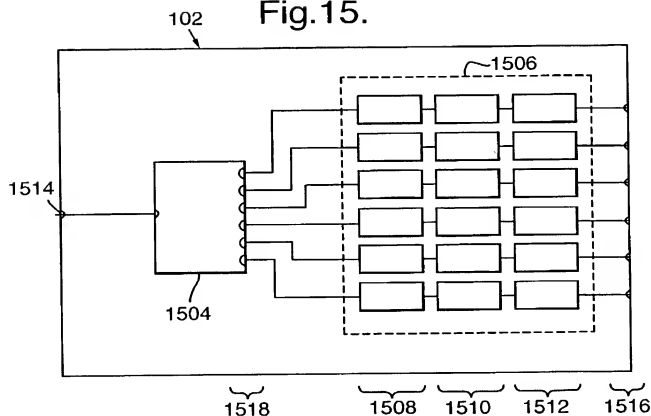


Fig.16A.






Fig.16B.

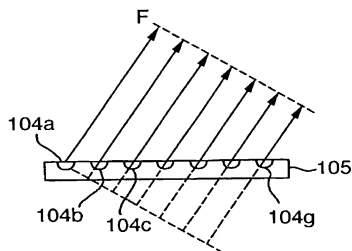


10/22

Fig.16C.

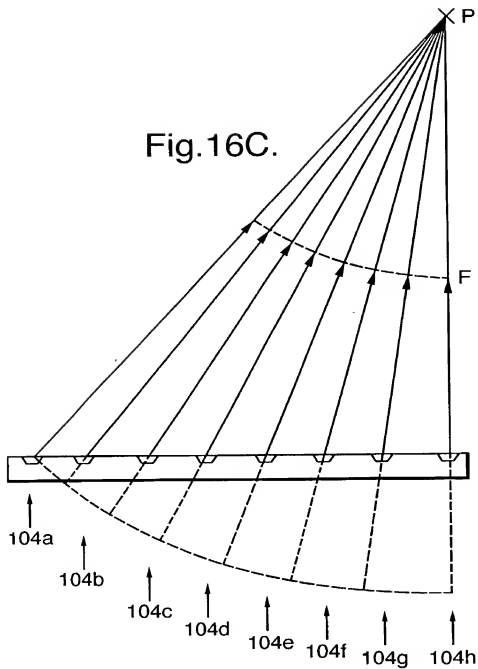

11/22

Fig. 16D.

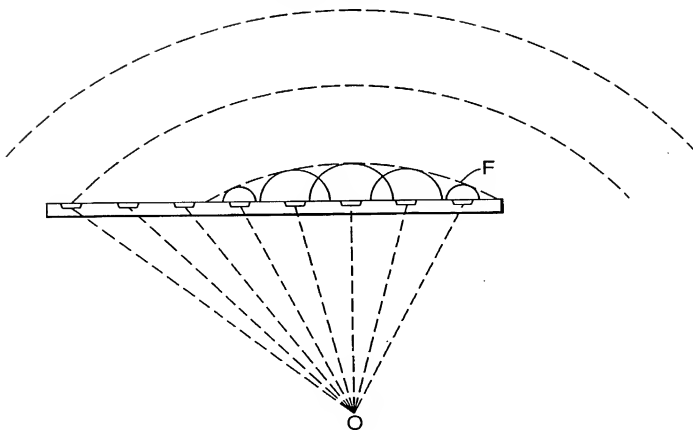


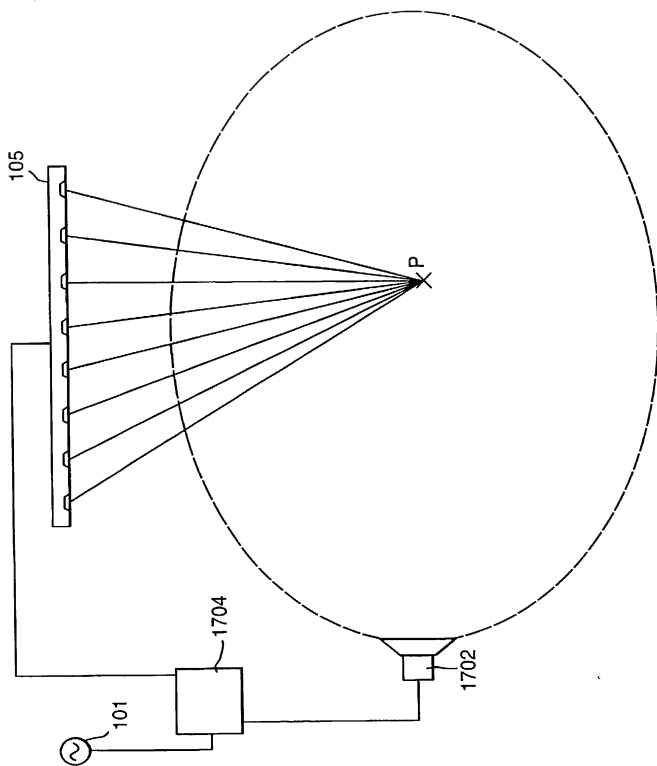


Fig.17.

13/22

Fig.18.

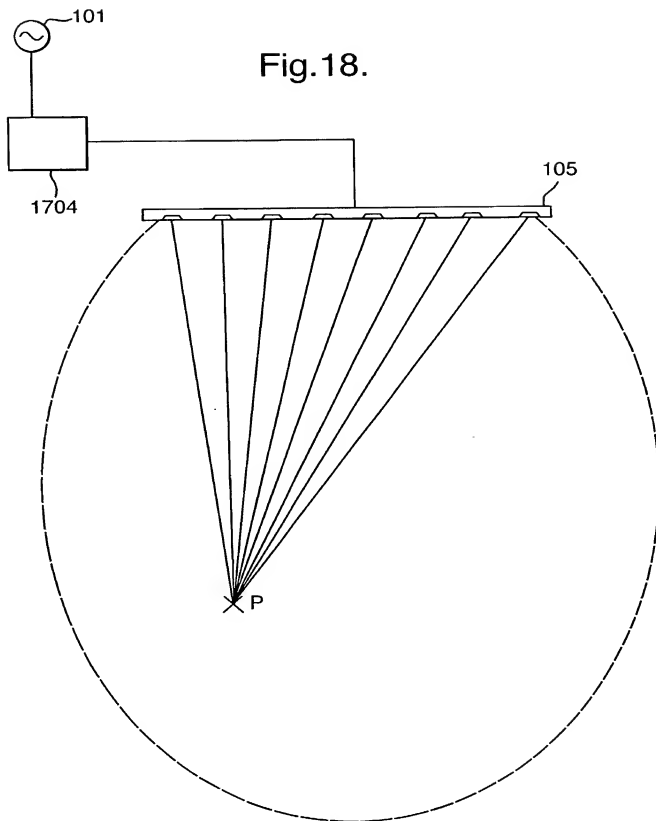

14/22

Fig.19.



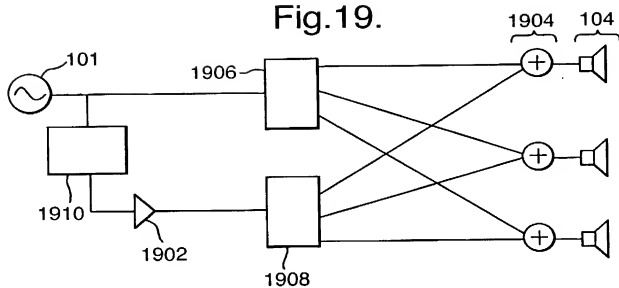


Fig.20.

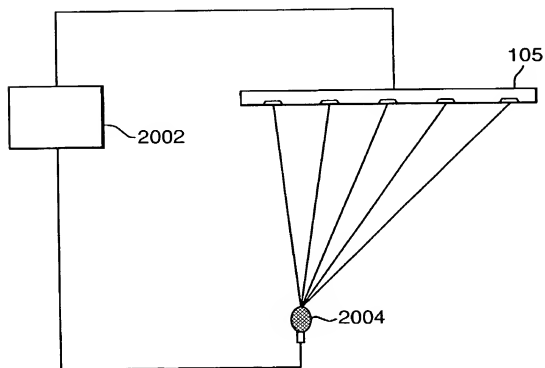


2102

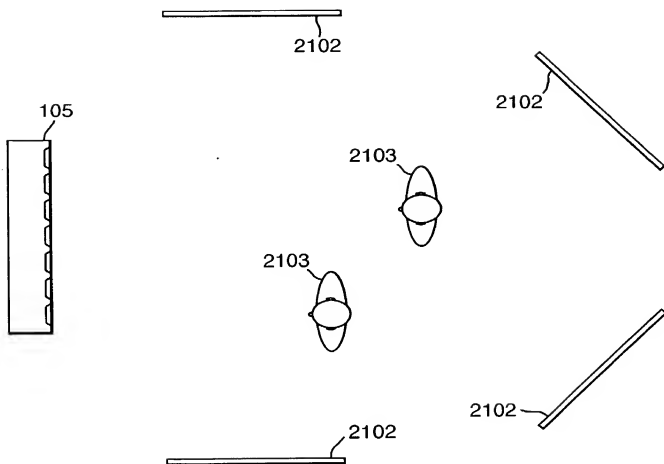

16/22

Fig.22.

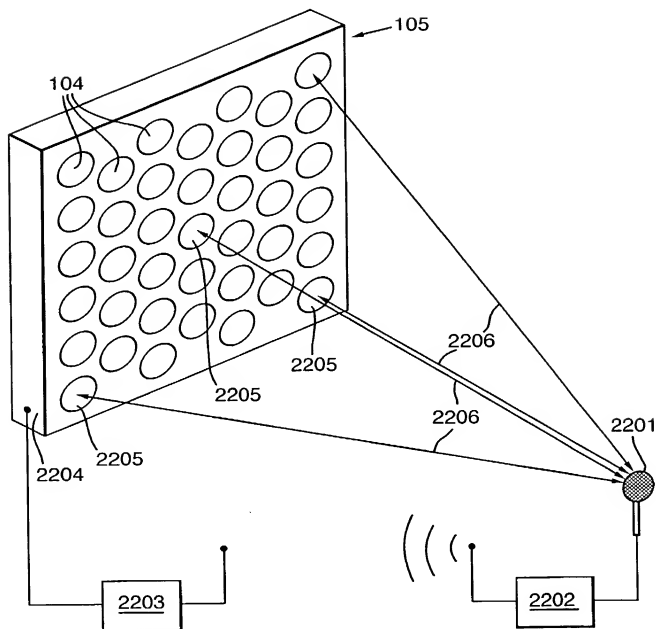

17/22

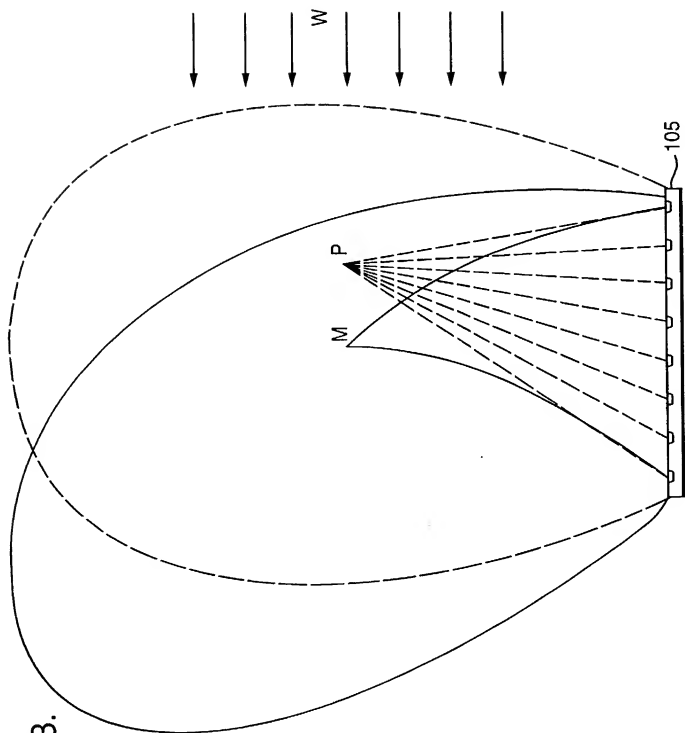


Fig.23.

18/22
Fig.24.

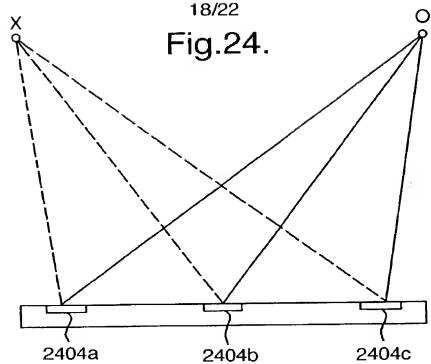


Fig.25A.




Fig.25B.




Fig.25C.




Fig.25D.




Fig.25E.





Fig.25F.



19/22

Fig.26A.

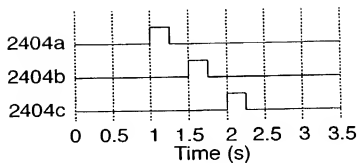


Fig.26B.




Fig.26C.




Fig.26D.




Fig.26E.





Fig.26F.



21/22

Fig.29.


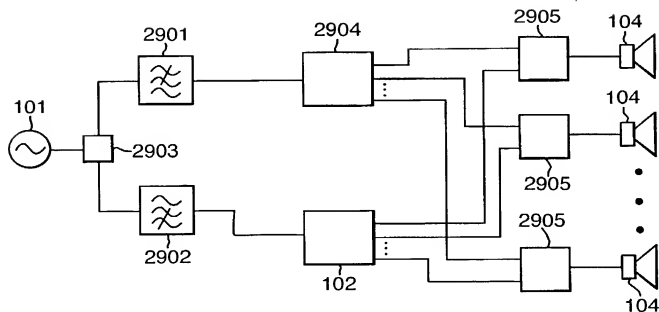


Fig.30.

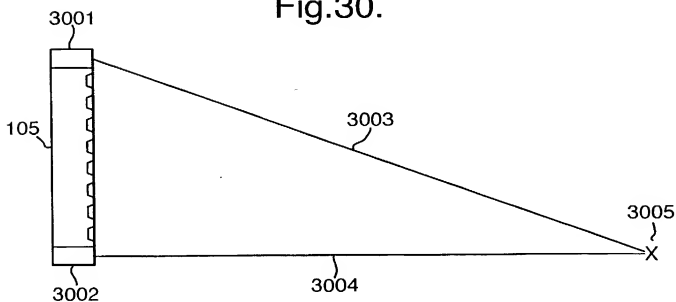

22/22

Fig.31.


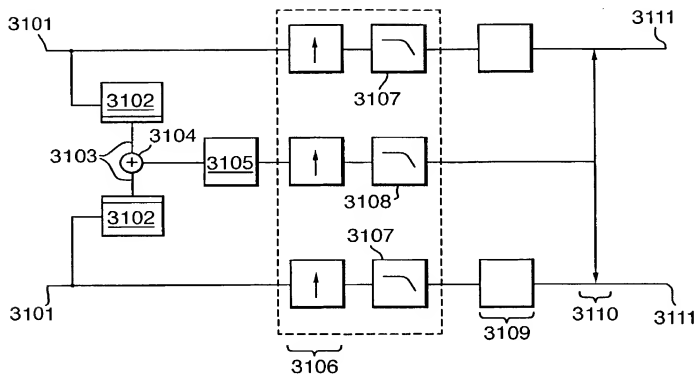


Fig.32.

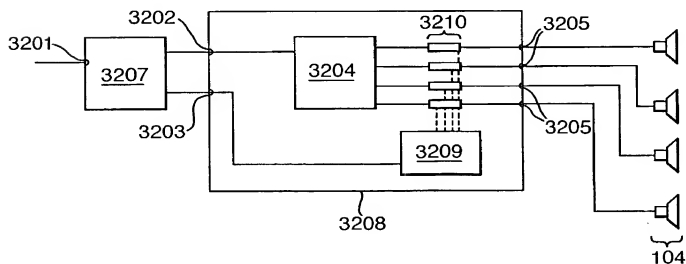

03/22/02 FRI 17:44 FAX 1 810 882 8577

ELMAN & ASSOC.

Mirza Akram

0004

Express Mail Label No.

21 JUN 2002 Page 1 of 4

10/08902

Docket No.
017-002

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS TO DIRECT SOUND

the specification of which

(check one)

☐ is attached hereto.

☒ was filed on September 29, 2000 as United States Application No. or PCT International Application Number PCT/GB00/03742 and was amended ~~on~~ by Preliminary Amendment submitted herewith

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

<u>9922919.7</u>	<u>GB</u>	<u>29 September 1999</u>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
<u>0011973.5</u>	<u>GB</u>	<u>19 May 2000</u>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
<u>0022479.0</u>	<u>GB</u>	<u>13 September 2000</u>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

360	Full name of third inventor, if any GOUDIE, Angus Gavin	
→	Third inventor's signature <i>M E Goudie</i>	Date March , 2002
	Residence Cambridge, England	APRIL 29
	Citizenship United Kingdom	
	Post Office Address St. John's Innovative Centre, Cowley Road	
	Cambridge CB4 0WS UNITED KINGDOM	
460	Full name of fourth inventor, if any BIENEK, Irving Alexander	
→	Fourth inventor's signature <i>Irving Bieneck</i>	Date March , 2002
	Residence Cambridge, England	APRIL 29
	Citizenship United Kingdom	
	Post Office Address St. John's Innovative Centre, Cowley Road	
	Cambridge CB4 0WS UNITED KINGDOM	
560	Full name of fifth inventor, if any WINDLE, Paul Raymond	
→	Fifth inventor's signature <i>Paul Windle</i>	Date March , 2002
	Residence Saffron Waldon, England	APRIL 29
	Citizenship United Kingdom	
	Post Office Address St. John's Innovative Centre, Cowley Road	
	Cambridge CB4 0WS UNITED KINGDOM	
	Full name of sixth inventor, if any	
	Sixth inventor's signature	Date
	Residence	
	Citizenship	
	Post Office Address	